


ENERGIZER L91
Ultimate Lithium



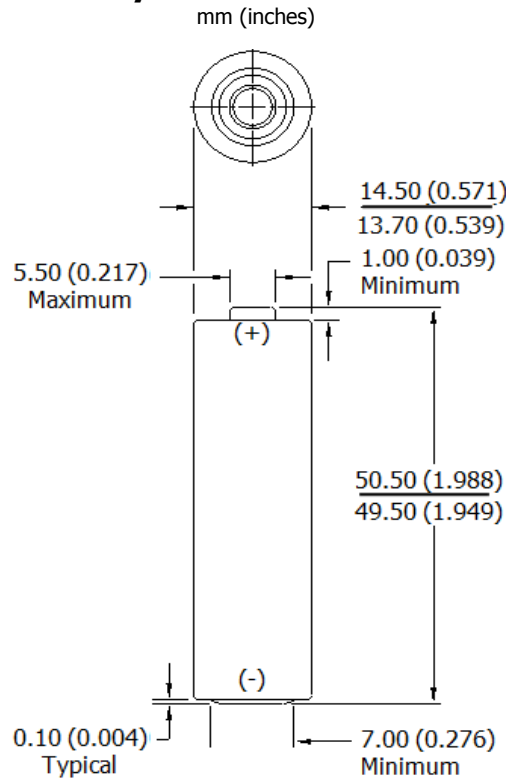

AA

Industry Standard Dimensions




Specifications


Classification:	"Cylindrical Primary Lithium"
Chemical System:	Lithium/Iron Disulfide (Li/FeS ₂)
Designation:	ANSI 15-LF, IEC-FR14505 (FR6)
Nominal Voltage:	1.5 Volts
Sizing Compatibility:	E91 NH15 1215
Storage Temp:	-40°C to 60°C (-40°F to 140°F)
Operating Temp:	-40°C to 60°C (-40°F to 140°F)*
Typical Weight:	15 grams (0.5 oz.)
Typical Volume:	8.0 cubic centimeters (0.49 cubic inch)
Max Discharge:	2.5 amps continuous
(single battery only)	4.0 amps pulse (2 sec on / 8 sec off)
Lithium Content:	Less than 1 gram
Typical IR:	120 to 240 milliohms (depending on method)
Shelf Life:	20 years at 21°C
More Details:	On-Line Catalog-Application Manual (Li/FeS₂)
Shipping:	Please refer to PSDS Document
Certifications:	 

***All data shown tested at 21°C unless otherwise stated.**


Milliamp-Hours Capacity

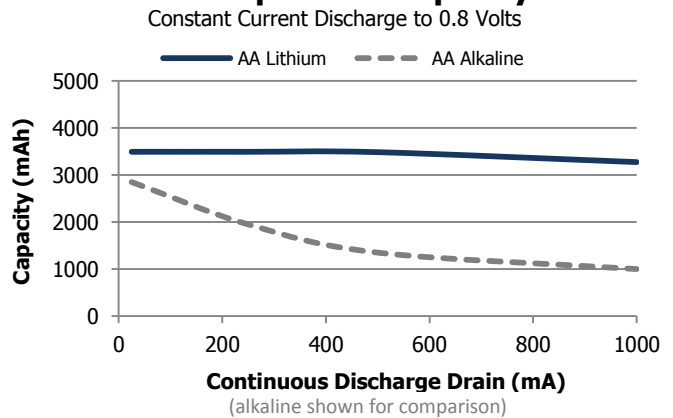

Discharge Profile

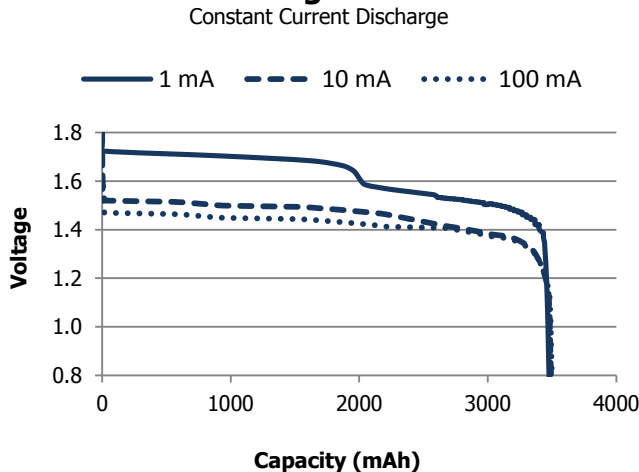

Temperature Effects on Capacity

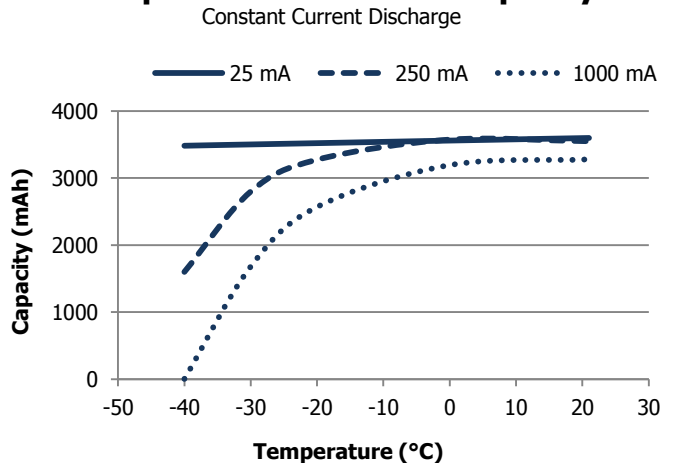

Important Notice


This datasheet contains typical information specific to products manufactured at the time of its publication.
Contents herein do not constitute a warranty and are for reference only.

ENERGIZER L91

AA


Internal Resistance Profile

Cell Ohmic Resistance - Dual Pulse Method

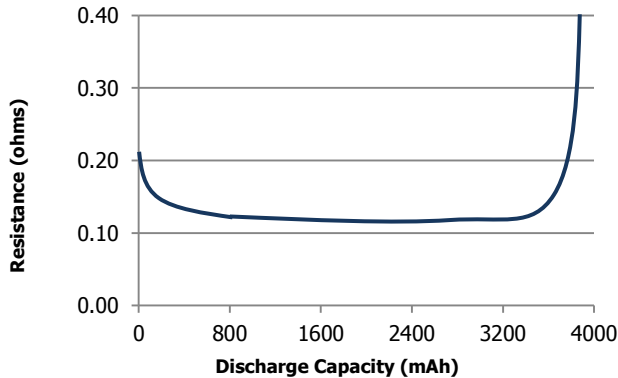


Pulse Response

Open Circuit Voltage - 100/500/1k mA Pulse

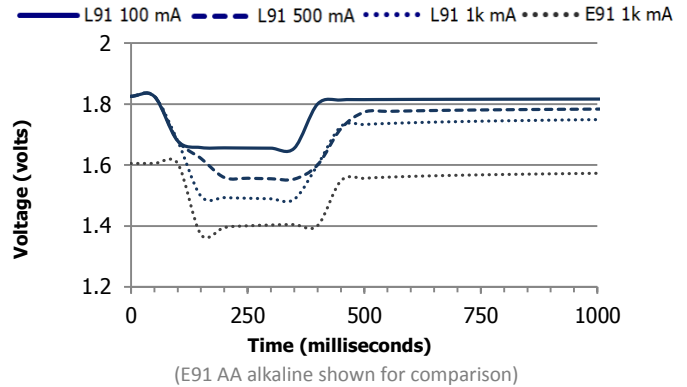


Constant Power Performance

Typical Characteristics to 0.8 Volts

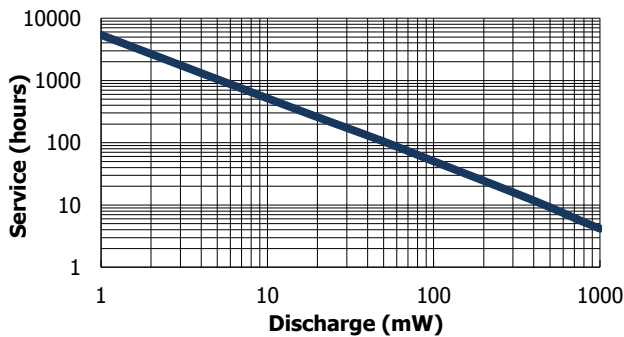


Constant Current Performance

Typical Characteristics to 0.8 Volts

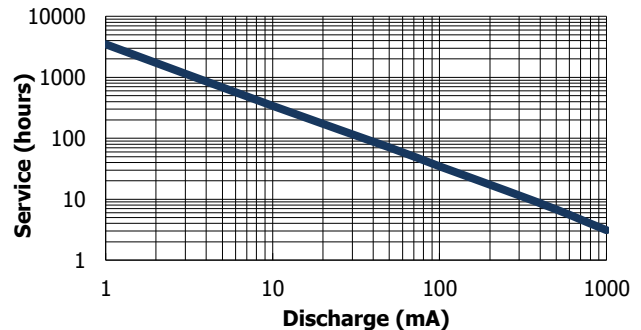

Application Tests


REMOTE/RADIO /CLOCK
50 mA 1 hr/8 hrs day

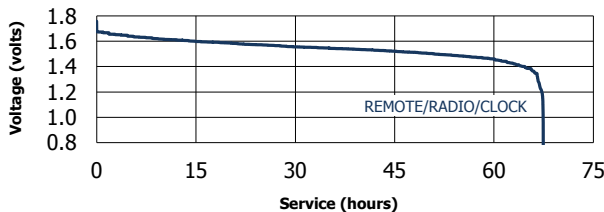

Application Tests

CD/GAMES
250 mA 1 hr/day


DIGITAL AUDIO
100 mA 1 hr/day

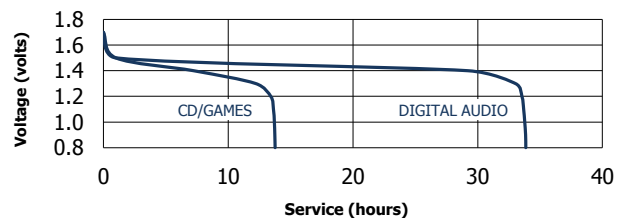

Application Tests

PORTABLE LIGHTING
3.3 ohm LIF


TOY
3.9 ohm 1 hr/day

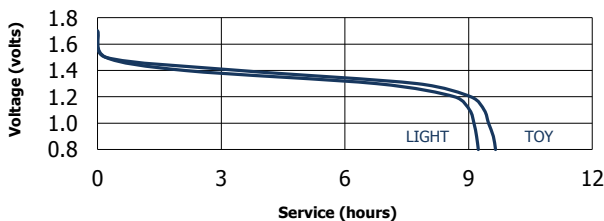

Industry Standard Tests

PERSONAL GROOMING
750 mA 2 min/hr 8 hrs/day

DIGITAL CAMERA
1.5/.65K mW 2/.1/27.9s 10X

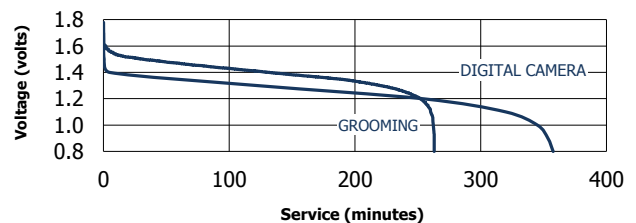

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
Contents herein do not constitute a warranty and are for reference only.