



XLamp® XP-L LEDs



XP-L High Density LED



XP-L High Intensity LED

PRODUCT DESCRIPTION

XLamp® XP-L LEDs are available in two versions: High Density (HD) and High Intensity (HI).

The XLamp XP-L HD LED is the highest performing discrete in Cree LED’s HD class of LEDs, delivering the next generation of lumen output and efficacy in the compact 3.45 mm x 3.45 mm XP footprint. Cree LED’s HD LEDs, optimized to deliver maximum lumen output in a small form factor, enable lighting manufacturers to improve the performance of any lighting design, create smaller and less expensive systems, and develop new lighting solutions that were previously not possible.

The XLamp XP-L HI LED is the first of Cree LED’s new class of high-intensity LEDs optimized to deliver maximum candela through secondary optics. Built on Cree LED’s breakthrough SC5 Technology® Platform, the XP-L HI LED delivers 120 percent more candela than the XP-L HD LED through the same optic. The XP-L HI LED leverages the industry’s highest single-die performance and a new innovative primary optic design that radically reduces the optical source size to deliver both lumens and intensity.

FEATURES

- Available in white, 70-CRI white, 80-CRI white, 85-CRI white and 90-CRI white
- ANSI-compatible chromaticity bins
- Binned at 85 °C
- Maximum drive current: 3000 mA
- Low thermal resistance: 0.5 °C/W
- Wide viewing angle: 125° (XP-L HD), 115° (XP-L HI)
- Unlimited floor life at ≤ 30 °C/85% RH
- Reflow solderable - JEDEC J-STD-020C
- Electrically neutral thermal path
- RoHS and REACH compliant
- UL® recognized component (E349212)

TABLE OF CONTENTS

| | |
|--|----|
| Characteristics | 2 |
| Flux Characteristics - XP-L High Density | 3 |
| Flux Characteristics - XP-L High Intensity | 8 |
| Relative Spectral Power Distribution | 12 |
| Relative Flux vs. Junction Temperature..... | 12 |
| Electrical Characteristics..... | 13 |
| Relative Flux vs. Current | 13 |
| Relative Chromaticity vs. Current..... | 14 |
| Relative Chromaticity vs. Temperature..... | 15 |
| Typical Spatial Distribution..... | 16 |
| Thermal Design | 16 |
| Performance Groups – Luminous Flux..... | 17 |
| Performance Groups – Chromaticity..... | 18 |
| Standard Cool White Kits Plotted on ANSI Standard Chromaticity Regions | 21 |
| Standard Warm and Neutral White Kits Plotted on ANSI Standard Chromaticity Regions | 22 |
| Standard Chromaticity Kits | 24 |
| Bin and Order Code Formats..... | 25 |
| Reflow Soldering Characteristics..... | 26 |
| Notes | 27 |
| Mechanical Dimensions | 29 |
| Tape and Reel..... | 31 |
| Packaging..... | 33 |



Cree LED / 4400 Silicon Drive / Durham, NC 27703 USA / +1.919.313.5330 / www.cree-led.com

CHARACTERISTICS

| Characteristics | Unit | Minimum | Typical | Maximum |
|---|---------|---------|---------|---------|
| Thermal resistance, junction to solder point* | °C/W | | 0.5 | |
| Viewing angle (FWHM) - XP-L High Density | degrees | | 125 | |
| Viewing angle (FWHM) - XP-L High Intensity | degrees | | 115 | |
| Temperature coefficient of voltage | mV/°C | | -1.3 | |
| ESD withstand voltage (HBM per Mil-Std-883D) | V | | | 8000 |
| DC forward current | mA | | | 3000 |
| Reverse voltage | V | | | 1 |
| Forward voltage (@ 1050 mA, 85 °C) | V | | 2.79 | 3.25 |
| LED junction temperature | °C | | | 150 |

* Thermal resistance measurement was performed per the JEDEC JESD51-14 standard.

FLUX CHARACTERISTICS - XP-L HIGH DENSITY (T_j = 85 °C)

The following table provides order codes for XLamp XP-L High Density LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 25). For definitions of the chromaticity kits, please see the Standard Chromaticity Kits section (page 24).

| Chromaticity | | Minimum Luminous Flux (lm) @ 1050 mA | | | Order Codes | |
|--------------|--------|---|----------------------|-----------------------|--------------------------|--------------------------|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 65 CRI Typical | 70 CRI Minimum |
| 51 | 6200 K | V6 | 480 | 535 | XPLAWT-00-0000-0000V6051 | XPLAWT-00-0000-000BV6051 |
| | | V5 | 460 | 513 | XPLAWT-00-0000-0000V5051 | XPLAWT-00-0000-000BV5051 |
| | | V4 | 440 | 491 | XPLAWT-00-0000-0000V4051 | XPLAWT-00-0000-000BV4051 |
| | | V3 | 420 | 468 | XPLAWT-00-0000-0000V3051 | XPLAWT-00-0000-000BV3051 |
| | | V2 | 400 | 446 | | XPLAWT-00-0000-000BV2051 |
| 53 | 6000 K | V6 | 480 | 535 | XPLAWT-00-0000-0000V6053 | XPLAWT-00-0000-000BV6053 |
| | | V5 | 460 | 513 | XPLAWT-00-0000-0000V5053 | XPLAWT-00-0000-000BV5053 |
| | | V4 | 440 | 491 | XPLAWT-00-0000-0000V4053 | XPLAWT-00-0000-000BV4053 |
| | | V3 | 420 | 468 | XPLAWT-00-0000-0000V3053 | XPLAWT-00-0000-000BV3053 |
| | | V2 | 400 | 446 | | XPLAWT-00-0000-000BV2053 |
| 50 | 6200 K | V6 | 480 | 535 | XPLAWT-00-0000-0000V6050 | XPLAWT-00-0000-000BV6050 |
| | | V5 | 460 | 513 | XPLAWT-00-0000-0000V5050 | XPLAWT-00-0000-000BV5050 |
| | | V4 | 440 | 491 | XPLAWT-00-0000-0000V4050 | XPLAWT-00-0000-000BV4050 |
| | | V3 | 420 | 468 | XPLAWT-00-0000-0000V3050 | XPLAWT-00-0000-000BV3050 |
| | | V2 | 400 | 446 | | XPLAWT-00-0000-000BV2050 |
| E1 | 6500 K | V6 | 480 | 535 | XPLAWT-00-0000-0000V60E1 | XPLAWT-00-0000-000BV60E1 |
| | | V5 | 460 | 513 | XPLAWT-00-0000-0000V50E1 | XPLAWT-00-0000-000BV50E1 |
| | | V4 | 440 | 491 | XPLAWT-00-0000-0000V40E1 | XPLAWT-00-0000-000BV40E1 |
| | | V3 | 420 | 468 | XPLAWT-00-0000-0000V30E1 | XPLAWT-00-0000-000BV30E1 |
| | | V2 | 400 | 446 | | XPLAWT-00-0000-000BV20E1 |
| E2 | 5700 K | V6 | 480 | 535 | XPLAWT-00-0000-0000V60E2 | XPLAWT-00-0000-000BV60E2 |
| | | V5 | 460 | 513 | XPLAWT-00-0000-0000V50E2 | XPLAWT-00-0000-000BV50E2 |
| | | V4 | 440 | 491 | XPLAWT-00-0000-0000V40E2 | XPLAWT-00-0000-000BV40E2 |
| | | V3 | 420 | 468 | | XPLAWT-00-0000-000BV30E2 |
| | | V2 | 400 | 446 | | XPLAWT-00-0000-000BV20E2 |

Notes

- Cree LED maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 27).
- XLamp XP-L LED order codes specify only a minimum flux bin and not a maximum. Cree LED may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS - XP-L HIGH DENSITY (T_j = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 1050 mA | | | Order Codes | | |
|--------------|--------|---|----------------------|-----------------------|--------------------------|--------------------------|--------------------------|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 70 CRI Minimum | 75 CRI Typical | 80 CRI Minimum |
| E3 | 5000 K | V6 | 480 | 535 | XPLAWT-00-0000-000BV60E3 | | |
| | | V5 | 460 | 513 | XPLAWT-00-0000-000BV50E3 | XPLAWT-00-0000-000LV50E3 | |
| | | V4 | 440 | 491 | XPLAWT-00-0000-000BV40E3 | XPLAWT-00-0000-000LV40E3 | |
| | | V3 | 420 | 468 | XPLAWT-00-0000-000BV30E3 | XPLAWT-00-0000-000LV30E3 | |
| | | V2 | 400 | 446 | XPLAWT-00-0000-000BV20E3 | XPLAWT-00-0000-000LV20E3 | |
| F4 | 4750 K | V6 | 480 | 535 | XPLAWT-00-0000-000BV60F4 | | |
| | | V5 | 460 | 513 | XPLAWT-00-0000-000BV50F4 | XPLAWT-00-0000-000LV50F4 | |
| | | V4 | 440 | 491 | XPLAWT-00-0000-000BV40F4 | XPLAWT-00-0000-000LV40F4 | |
| | | V3 | 420 | 468 | XPLAWT-00-0000-000BV30F4 | XPLAWT-00-0000-000LV30F4 | |
| | | V2 | 400 | 446 | XPLAWT-00-0000-000BV20F4 | XPLAWT-00-0000-000LV20F4 | |
| E4 | 4500 K | V6 | 480 | 535 | XPLAWT-00-0000-000BV60E4 | | |
| | | V5 | 460 | 513 | XPLAWT-00-0000-000BV50E4 | XPLAWT-00-0000-000LV50E4 | |
| | | V4 | 440 | 491 | XPLAWT-00-0000-000BV40E4 | XPLAWT-00-0000-000LV40E4 | |
| | | V3 | 420 | 468 | XPLAWT-00-0000-000BV30E4 | XPLAWT-00-0000-000LV30E4 | |
| | | V2 | 400 | 446 | XPLAWT-00-0000-000BV20E4 | XPLAWT-00-0000-000LV20E4 | |
| F5 | 4250 K | V6 | 480 | 535 | XPLAWT-00-0000-000BV60F5 | | |
| | | V5 | 460 | 513 | XPLAWT-00-0000-000BV50F5 | XPLAWT-00-0000-000LV50F5 | |
| | | V4 | 440 | 491 | XPLAWT-00-0000-000BV40F5 | XPLAWT-00-0000-000LV40F5 | |
| | | V3 | 420 | 468 | XPLAWT-00-0000-000BV30F5 | XPLAWT-00-0000-000LV30F5 | |
| | | V2 | 400 | 446 | XPLAWT-00-0000-000BV20F5 | XPLAWT-00-0000-000LV20F5 | |
| E5 | 4000 K | V6 | 480 | 535 | XPLAWT-00-0000-000BV60E5 | | |
| | | V5 | 460 | 513 | XPLAWT-00-0000-000BV50E5 | | |
| | | V4 | 440 | 491 | XPLAWT-00-0000-000BV40E5 | XPLAWT-00-0000-000LV40E5 | XPLAWT-00-0000-000HV40E5 |
| | | V3 | 420 | 468 | XPLAWT-00-0000-000BV30E5 | XPLAWT-00-0000-000LV30E5 | XPLAWT-00-0000-000HV30E5 |
| | | V2 | 400 | 446 | XPLAWT-00-0000-000BV20E5 | XPLAWT-00-0000-000LV20E5 | XPLAWT-00-0000-000HV20E5 |
| | | U6 | 380 | 424 | XPLAWT-00-0000-000BU60E5 | XPLAWT-00-0000-000LU60E5 | XPLAWT-00-0000-000HU60E5 |
| | | U5 | 360 | 401 | | | XPLAWT-00-0000-000HU50E5 |
| Z5 | 4000 K | V4 | 440 | 491 | XPLAWT-00-0000-000BV40Z5 | XPLAWT-00-0000-000LV40Z5 | XPLAWT-00-0000-000HV40Z5 |
| | | V3 | 420 | 468 | XPLAWT-00-0000-000BV30Z5 | XPLAWT-00-0000-000LV30Z5 | XPLAWT-00-0000-000HV30Z5 |
| | | V2 | 400 | 446 | XPLAWT-00-0000-000BV20Z5 | XPLAWT-00-0000-000LV20Z5 | XPLAWT-00-0000-000HV20Z5 |
| | | U6 | 380 | 424 | XPLAWT-00-0000-000BU60Z5 | XPLAWT-00-0000-000LU60Z5 | XPLAWT-00-0000-000HU60Z5 |
| | | U5 | 360 | 401 | | | XPLAWT-00-0000-000HU50Z5 |

Notes

- Cree LED maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 27).
- XLamp XP-L LED order codes specify only a minimum flux bin and not a maximum. Cree LED may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS - XP-L HIGH DENSITY (T_j = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 1050 mA | | | Order Codes | | |
|--------------|--------|--------------------------------------|-------------------|--------------------|----------------|--------------------------|--------------------------|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 70 CRI Minimum | 75 CRI Typical | 80 CRI Minimum |
| F6 | 3700 K | V4 | 440 | 491 | | | XPLAWT-00-0000-000HV40F6 |
| | | V3 | 420 | 468 | | XPLAWT-00-0000-000LV30F6 | XPLAWT-00-0000-000HV30F6 |
| | | V2 | 400 | 446 | | XPLAWT-00-0000-000LV20F6 | XPLAWT-00-0000-000HV20F6 |
| | | U6 | 380 | 424 | | XPLAWT-00-0000-000LU60F6 | XPLAWT-00-0000-000HU60F6 |
| | | U5 | 360 | 401 | | XPLAWT-00-0000-000LU50F6 | XPLAWT-00-0000-000HU50F6 |

| Chromaticity | | Minimum Luminous Flux (lm) @ 1050 mA | | | Order Codes | | | |
|--------------|--------|--------------------------------------|-------------------|--------------------|--------------------------|--------------------------|----------------|----------------|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 80 CRI Typical | 80 CRI Minimum | 85 CRI Minimum | 90 CRI Minimum |
| E6 | 3500 K | V3 | 420 | 468 | XPLAWT-00-0000-000LV30E6 | XPLAWT-00-0000-000HV30E6 | | |
| | | V2 | 400 | 446 | XPLAWT-00-0000-000LV20E6 | XPLAWT-00-0000-000HV20E6 | | |
| | | U6 | 380 | 424 | XPLAWT-00-0000-000LU60E6 | XPLAWT-00-0000-000HU60E6 | | |
| | | U5 | 360 | 401 | XPLAWT-00-0000-000LU50E6 | XPLAWT-00-0000-000HU50E6 | | |
| Z6 | 3500 K | V2 | 400 | 446 | XPLAWT-00-0000-000LV20Z6 | XPLAWT-00-0000-000HV20Z6 | | |
| | | U6 | 380 | 424 | XPLAWT-00-0000-000LU60Z6 | XPLAWT-00-0000-000HU60Z6 | | |
| | | U5 | 360 | 401 | XPLAWT-00-0000-000LU50Z6 | XPLAWT-00-0000-000HU50Z6 | | |
| F7 | 3250 K | V2 | 400 | 446 | XPLAWT-00-0000-000LV20F7 | XPLAWT-00-0000-000HV20F7 | | |
| | | U6 | 380 | 424 | XPLAWT-00-0000-000LU60F7 | XPLAWT-00-0000-000HU60F7 | | |
| | | U5 | 360 | 401 | XPLAWT-00-0000-000LU50F7 | XPLAWT-00-0000-000HU50F7 | | |
| | | U4 | 340 | 379 | XPLAWT-00-0000-000LU40F7 | XPLAWT-00-0000-000HU40F7 | | |

Notes

- Cree LED maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 27).
- XLamp XP-L LED order codes specify only a minimum flux bin and not a maximum. Cree LED may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS - XP-L HIGH DENSITY (T_j = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 1050 mA | | | Order Codes | | | |
|--------------|--------|--------------------------------------|-------------------|--------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 80 CRI Typical | 80 CRI Minimum | 85 CRI Minimum | 90 CRI Minimum |
| E7 | 3000 K | V2 | 400 | 446 | XPLAWT-00-0000-000LV20E7 | XPLAWT-00-0000-000HV20E7 | | |
| | | U6 | 380 | 424 | XPLAWT-00-0000-000LU60E7 | XPLAWT-00-0000-000HU60E7 | | |
| | | U5 | 360 | 401 | XPLAWT-00-0000-000LU50E7 | XPLAWT-00-0000-000HU50E7 | | |
| | | U4 | 340 | 379 | XPLAWT-00-0000-000LU40E7 | XPLAWT-00-0000-000HU40E7 | | |
| | | U3 | 320 | 357 | | | XPLAWT-00-0000-000PU30E7 | XPLAWT-00-0000-000UU30E7 |
| | | U2 | 300 | 334 | | | XPLAWT-00-0000-000PU20E7 | XPLAWT-00-0000-000UU20E7 |
| | | T6 | 280 | 312 | | | XPLAWT-00-0000-000PT60E7 | XPLAWT-00-0000-000UT60E7 |
| Z7 | 3000 K | U6 | 380 | 424 | XPLAWT-00-0000-000LU60Z7 | XPLAWT-00-0000-000HU60Z7 | | |
| | | U5 | 360 | 401 | XPLAWT-00-0000-000LU50Z7 | XPLAWT-00-0000-000HU50Z7 | | |
| | | U4 | 340 | 379 | XPLAWT-00-0000-000LU40Z7 | XPLAWT-00-0000-000HU40Z7 | | |
| | | U3 | 320 | 357 | | | XPLAWT-00-0000-000PU30Z7 | XPLAWT-00-0000-000UU30Z7 |
| | | U2 | 300 | 334 | | | XPLAWT-00-0000-000PU20Z7 | XPLAWT-00-0000-000UU20Z7 |
| | | T6 | 280 | 312 | | | XPLAWT-00-0000-000PT60Z7 | XPLAWT-00-0000-000UT60Z7 |
| F8 | 2850 K | V2 | 400 | 446 | XPLAWT-00-0000-000LV20F8 | | | |
| | | U6 | 380 | 424 | XPLAWT-00-0000-000LU60F8 | XPLAWT-00-0000-000HU60F8 | | |
| | | U5 | 360 | 401 | XPLAWT-00-0000-000LU50F8 | XPLAWT-00-0000-000HU50F8 | | |
| | | U4 | 340 | 379 | XPLAWT-00-0000-000LU40F8 | XPLAWT-00-0000-000HU40F8 | | |
| | | U3 | 320 | 357 | | | XPLAWT-00-0000-000PU30F8 | XPLAWT-00-0000-000UU30F8 |
| | | U2 | 300 | 334 | | | XPLAWT-00-0000-000PU20F8 | XPLAWT-00-0000-000UU20F8 |
| | | T6 | 280 | 312 | | | XPLAWT-00-0000-000PT60F8 | XPLAWT-00-0000-000UT60F8 |
| | | T5 | 260 | 290 | | | XPLAWT-00-0000-000PT50F8 | XPLAWT-00-0000-000UT50F8 |

Notes

- Cree LED maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 27).
- XLamp XP-L LED order codes specify only a minimum flux bin and not a maximum. Cree LED may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS - XP-L HIGH DENSITY (T_j = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 1050 mA | | | Order Codes | | | | |
|--------------|--------|--------------------------------------|-------------------|--------------------|--------------------------|--------------------------|--------------------------|--------------------------|--|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 80 CRI Typical | 80 CRI Minimum | 85 CRI Minimum | 90 CRI Minimum | |
| E8 | 2700 K | V2 | 400 | 446 | XPLAWT-00-0000-000LV20E8 | | | | |
| | | U6 | 380 | 424 | XPLAWT-00-0000-000LU60E8 | XPLAWT-00-0000-000HU60E8 | | | |
| | | U5 | 360 | 401 | XPLAWT-00-0000-000LU50E8 | XPLAWT-00-0000-000HU50E8 | | | |
| | | U4 | 340 | 379 | XPLAWT-00-0000-000LU40E8 | XPLAWT-00-0000-000HU40E8 | | | |
| | | U3 | 320 | 357 | | | XPLAWT-00-0000-000PU30E8 | XPLAWT-00-0000-000UU30E8 | |
| | | U2 | 300 | 334 | | | XPLAWT-00-0000-000PU20E8 | XPLAWT-00-0000-000UU20E8 | |
| | | T6 | 280 | 312 | | | XPLAWT-00-0000-000PT60E8 | XPLAWT-00-0000-000UT60E8 | |
| | | T5 | 260 | 290 | | | XPLAWT-00-0000-000PT50E8 | XPLAWT-00-0000-000UT50E8 | |
| Z8 | 2700 K | U6 | 380 | 424 | XPLAWT-00-0000-000LU60Z8 | | | | |
| | | U5 | 360 | 401 | XPLAWT-00-0000-000LU50Z8 | XPLAWT-00-0000-000HU50Z8 | | | |
| | | U4 | 340 | 379 | XPLAWT-00-0000-000LU40Z8 | XPLAWT-00-0000-000HU40Z8 | | | |
| | | U3 | 320 | 357 | | | | | |
| | | U2 | 300 | 334 | | | XPLAWT-00-0000-000PU20Z8 | XPLAWT-00-0000-000UU20Z8 | |
| | | T6 | 280 | 312 | | | XPLAWT-00-0000-000PT60Z8 | XPLAWT-00-0000-000UT60Z8 | |
| | | T5 | 260 | 290 | | | XPLAWT-00-0000-000PT50Z8 | XPLAWT-00-0000-000UT50Z8 | |

Notes

- Cree LED maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 27).
- XLamp XP-L LED order codes specify only a minimum flux bin and not a maximum. Cree LED may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS - XP-L HIGH INTENSITY ($T_j = 85\text{ °C}$)

The following table provides order codes for XLamp XP-L High Intensity LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 25). For definitions of the chromaticity kits, please see the Standard Chromaticity Kits section (page 24).

| Chromaticity | | Minimum Luminous Flux (lm) @ 1050 mA | | | Order Codes | |
|--------------|--------|---|----------------------|-----------------------|--------------------------|--------------------------|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 65 CRI Typical | 70 CRI Minimum |
| 51 | 6200 K | V2 | 400 | 446 | XPLAWT-H0-0000-0000V2051 | XPLAWT-H0-0000-000BV2051 |
| | | U6 | 380 | 424 | XPLAWT-H0-0000-0000U6051 | XPLAWT-H0-0000-000BU6051 |
| | | U5 | 360 | 401 | XPLAWT-H0-0000-0000U5051 | XPLAWT-H0-0000-000BU5051 |
| 53 | 6000 K | V2 | 400 | 446 | XPLAWT-H0-0000-0000V2053 | XPLAWT-H0-0000-000BV2053 |
| | | U6 | 380 | 424 | XPLAWT-H0-0000-0000U6053 | XPLAWT-H0-0000-000BU6053 |
| | | U5 | 360 | 401 | XPLAWT-H0-0000-0000U5053 | XPLAWT-H0-0000-000BU5053 |
| 50 | 6200 K | V2 | 400 | 446 | XPLAWT-H0-0000-0000V2050 | XPLAWT-H0-0000-000BV2050 |
| | | U6 | 380 | 424 | XPLAWT-H0-0000-0000U6050 | XPLAWT-H0-0000-000BU6050 |
| | | U5 | 360 | 401 | XPLAWT-H0-0000-0000U5050 | XPLAWT-H0-0000-000BU5050 |
| E1 | 6500 K | V2 | 400 | 446 | XPLAWT-H0-0000-0000V20E1 | XPLAWT-H0-0000-000BV20E1 |
| | | U6 | 380 | 424 | XPLAWT-H0-0000-0000U60E1 | XPLAWT-H0-0000-000BU60E1 |
| | | U5 | 360 | 401 | XPLAWT-H0-0000-0000U50E1 | XPLAWT-H0-0000-000BU50E1 |
| E2 | 5700 K | V2 | 400 | 446 | XPLAWT-H0-0000-0000V20E2 | XPLAWT-H0-0000-000BV20E2 |
| | | U6 | 380 | 424 | XPLAWT-H0-0000-0000U60E2 | XPLAWT-H0-0000-000BU60E2 |
| | | U5 | 360 | 401 | XPLAWT-H0-0000-0000U50E2 | XPLAWT-H0-0000-000BU50E2 |

Notes

- Cree LED maintains a tolerance of $\pm 7\%$ on flux and power measurements, ± 0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ± 2 on CRI measurements. See the Measurements section (page 27).
- XLamp XP-L LED order codes specify only a minimum flux bin and not a maximum. Cree LED may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS - XP-L HIGH INTENSITY (T_J = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 1050 mA | | | Order Codes | | |
|--------------|--------|--------------------------------------|-------------------|--------------------|--------------------------|--------------------------|--------------------------|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 70 CRI Minimum | 75 CRI Typical | 80 CRI Minimum |
| E3 | 5000 K | V2 | 400 | 446 | XPLAWT-H0-0000-000BV20E3 | XPLAWT-H0-0000-000LV20E3 | |
| | | U6 | 380 | 424 | XPLAWT-H0-0000-000BU60E3 | XPLAWT-H0-0000-000LU60E3 | |
| | | U5 | 360 | 401 | XPLAWT-H0-0000-000BU50E3 | XPLAWT-H0-0000-000LU50E3 | |
| F4 | 4750 K | V2 | 400 | 446 | XPLAWT-H0-0000-000BV20F4 | XPLAWT-H0-0000-000LV20F4 | |
| | | U6 | 380 | 424 | XPLAWT-H0-0000-000BU60F4 | XPLAWT-H0-0000-000LU60F4 | |
| | | U5 | 360 | 401 | XPLAWT-H0-0000-000BU50F4 | XPLAWT-H0-0000-000LU50F4 | |
| E4 | 4500 K | V2 | 400 | 446 | XPLAWT-H0-0000-000BV20E4 | XPLAWT-H0-0000-000LV20E4 | |
| | | U6 | 380 | 424 | XPLAWT-H0-0000-000BU60E4 | XPLAWT-H0-0000-000LU60E4 | |
| | | U5 | 360 | 401 | XPLAWT-H0-0000-000BU50E4 | XPLAWT-H0-0000-000LU50E4 | |
| F5 | 4250 K | V2 | 400 | 446 | XPLAWT-H0-0000-000BV20F5 | XPLAWT-H0-0000-000LV20F5 | |
| | | U6 | 380 | 424 | XPLAWT-H0-0000-000BU60F5 | XPLAWT-H0-0000-000LU60F5 | |
| | | U5 | 360 | 401 | XPLAWT-H0-0000-000BU50F5 | XPLAWT-H0-0000-000LU50F5 | |
| E5 | 4000 K | V2 | 400 | 446 | XPLAWT-H0-0000-000BV20E5 | XPLAWT-H0-0000-000LV20E5 | |
| | | U6 | 380 | 424 | XPLAWT-H0-0000-000BU60E5 | XPLAWT-H0-0000-000LU60E5 | XPLAWT-H0-0000-000HU60E5 |
| | | U5 | 360 | 401 | XPLAWT-H0-0000-000BU50E5 | XPLAWT-H0-0000-000LU50E5 | XPLAWT-H0-0000-000HU50E5 |
| | | U4 | 340 | 379 | XPLAWT-H0-0000-000BU40E5 | XPLAWT-H0-0000-000LU40E5 | XPLAWT-H0-0000-000HU40E5 |
| F6 | 3700 K | U5 | 360 | 401 | | XPLAWT-H0-0000-000LU50F6 | XPLAWT-H0-0000-000HU50F6 |
| | | U4 | 340 | 379 | | XPLAWT-H0-0000-000LU40F6 | XPLAWT-H0-0000-000HU40F6 |
| | | U3 | 320 | 357 | | XPLAWT-H0-0000-000LU30F6 | XPLAWT-H0-0000-000HU30F6 |

Notes

- Cree LED maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 27).
- XLamp XP-L LED order codes specify only a minimum flux bin and not a maximum. Cree LED may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.

FLUX CHARACTERISTICS - XP-L HIGH INTENSITY (T_J = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 1050 mA | | | Order Codes | | | |
|--------------|--------|--------------------------------------|-------------------|--------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 80 CRI Typical | 80 CRI Minimum | 85 CRI Minimum | 90 CRI Minimum |
| E6 | 3500 K | U5 | 360 | 401 | XPLAWT-H0-0000-000LU50E6 | XPLAWT-H0-0000-000HU50E6 | | |
| | | U4 | 340 | 379 | XPLAWT-H0-0000-000LU40E6 | XPLAWT-H0-0000-000HU40E6 | | |
| | | U3 | 320 | 357 | XPLAWT-H0-0000-000LU30E6 | XPLAWT-H0-0000-000HU30E6 | | |
| F7 | 3250 K | U4 | 340 | 379 | XPLAWT-H0-0000-000LU40F7 | XPLAWT-H0-0000-000HU40F7 | | |
| | | U3 | 320 | 357 | XPLAWT-H0-0000-000LU30F7 | XPLAWT-H0-0000-000HU30F7 | | |
| | | U2 | 300 | 334 | XPLAWT-H0-0000-000LU20F7 | XPLAWT-H0-0000-000HU20F7 | | |
| E7 | 3000 K | U4 | 340 | 379 | XPLAWT-H0-0000-000LU40E7 | XPLAWT-H0-0000-000HU40E7 | | |
| | | U3 | 320 | 357 | XPLAWT-H0-0000-000LU30E7 | XPLAWT-H0-0000-000HU30E7 | | |
| | | U2 | 300 | 334 | XPLAWT-H0-0000-000LU20E7 | XPLAWT-H0-0000-000HU20E7 | | |
| | | T6 | 280 | 312 | | | XPLAWT-H0-0000-000PT60E7 | XPLAWT-H0-0000-000UT60E7 |
| | | T5 | 260 | 290 | | | XPLAWT-H0-0000-000PT50E7 | XPLAWT-H0-0000-000UT50E7 |
| | | T4 | 240 | 268 | | | XPLAWT-H0-0000-000PT40E7 | XPLAWT-H0-0000-000UT40E7 |
| F8 | 2850 K | U4 | 340 | 379 | XPLAWT-H0-0000-000LU40F8 | XPLAWT-H0-0000-000HU40F8 | | |
| | | U3 | 320 | 357 | XPLAWT-H0-0000-000LU30F8 | XPLAWT-H0-0000-000HU30F8 | | |
| | | U2 | 300 | 334 | XPLAWT-H0-0000-000LU20F8 | XPLAWT-H0-0000-000HU20F8 | | |
| | | T6 | 280 | 312 | | | XPLAWT-H0-0000-000PT60F8 | |
| | | T5 | 260 | 290 | | | XPLAWT-H0-0000-000PT50F8 | XPLAWT-H0-0000-000UT50F8 |
| | | T4 | 240 | 268 | | | XPLAWT-H0-0000-000PT40F8 | XPLAWT-H0-0000-000UT40F8 |
| | | T3 | 220 | 245 | | | XPLAWT-H0-0000-000PT30F8 | |

Notes

- Cree LED maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 27).
- XLamp XP-L LED order codes specify only a minimum flux bin and not a maximum. Cree LED may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.


FLUX CHARACTERISTICS - XP-L HIGH INTENSITY (T_J = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 1050 mA | | | Order Codes | | | |
|--------------|--------|--------------------------------------|-------------------|--------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | 80 CRI Typical | 80 CRI Minimum | 85 CRI Minimum | 90 CRI Minimum |
| E8 | 2700 K | U4 | 340 | 379 | XPLAWT-H0-0000-000LU40E8 | | | |
| | | U3 | 320 | 357 | XPLAWT-H0-0000-000LU30E8 | XPLAWT-H0-0000-000HU30E8 | | |
| | | U2 | 300 | 334 | XPLAWT-H0-0000-000LU20E8 | XPLAWT-H0-0000-000HU20E8 | | |
| | | T6 | 280 | 312 | | | XPLAWT-H0-0000-000PT60E8 | |
| | | T5 | 260 | 290 | | | XPLAWT-H0-0000-000PT50E8 | XPLAWT-H0-0000-000UT50E8 |
| | | T4 | 240 | 268 | | | XPLAWT-H0-0000-000PT40E8 | XPLAWT-H0-0000-000UT40E8 |
| | | T3 | 220 | 245 | | | XPLAWT-H0-0000-000PT30E8 | |


Notes

- Cree LED maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and a tolerance of ±2 on CRI measurements. See the Measurements section (page 27).
- XLamp XP-L LED order codes specify only a minimum flux bin and not a maximum. Cree LED may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity bin restrictions specified by the order code.
- * Flux values @ 25 °C are calculated and for reference only.


RELATIVE SPECTRAL POWER DISTRIBUTION

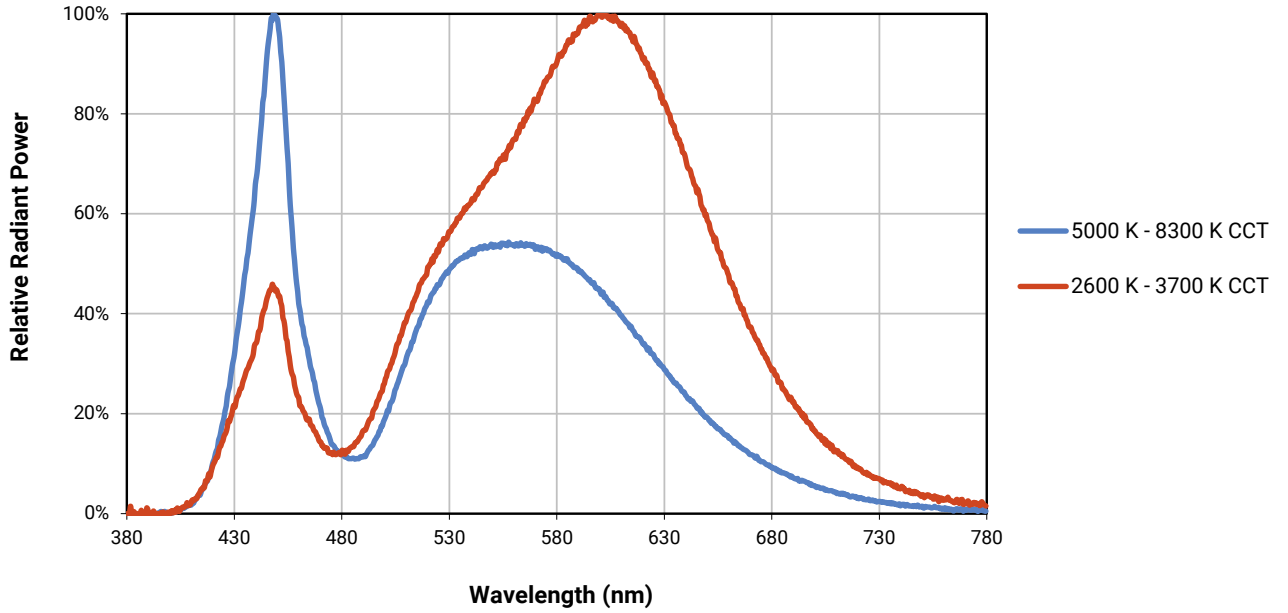


RELATIVE FLUX VS. JUNCTION TEMPERATURE ($I_f = 1050 \text{ mA}$)

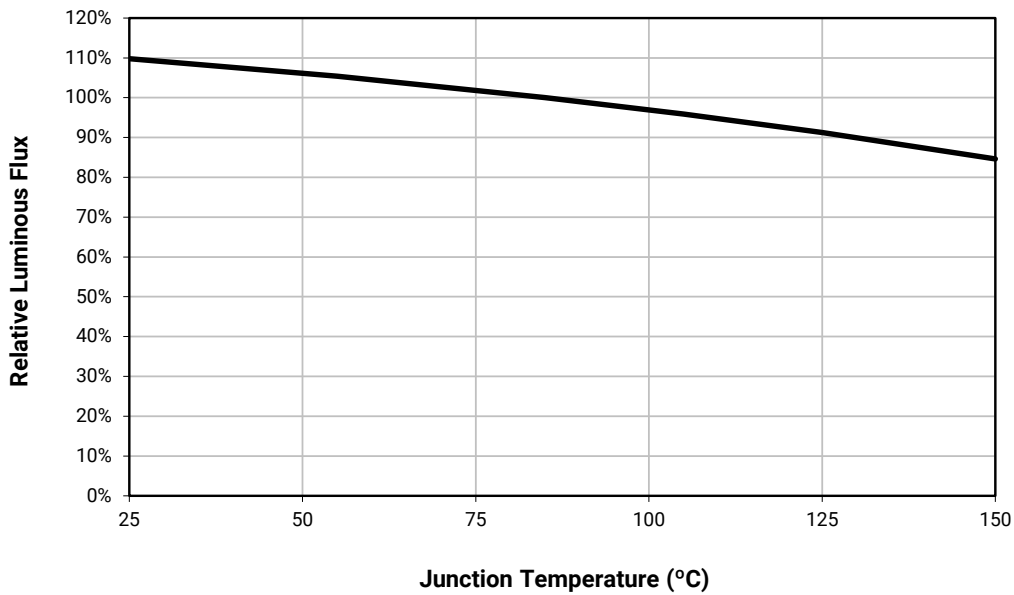



ELECTRICAL CHARACTERISTICS ($T_j = 85\text{ }^\circ\text{C}$)

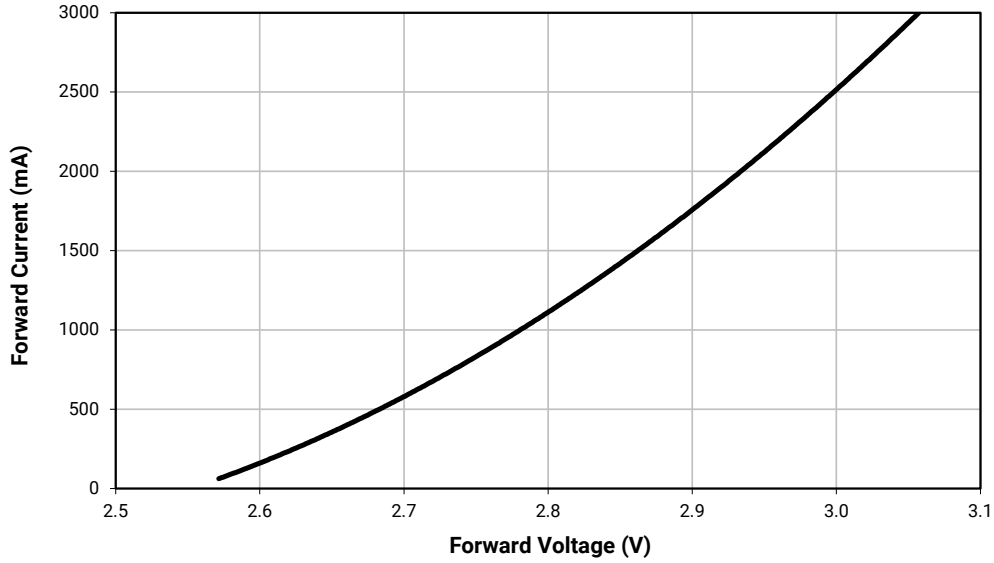



RELATIVE FLUX VS. CURRENT ($T_j = 85\text{ }^\circ\text{C}$)

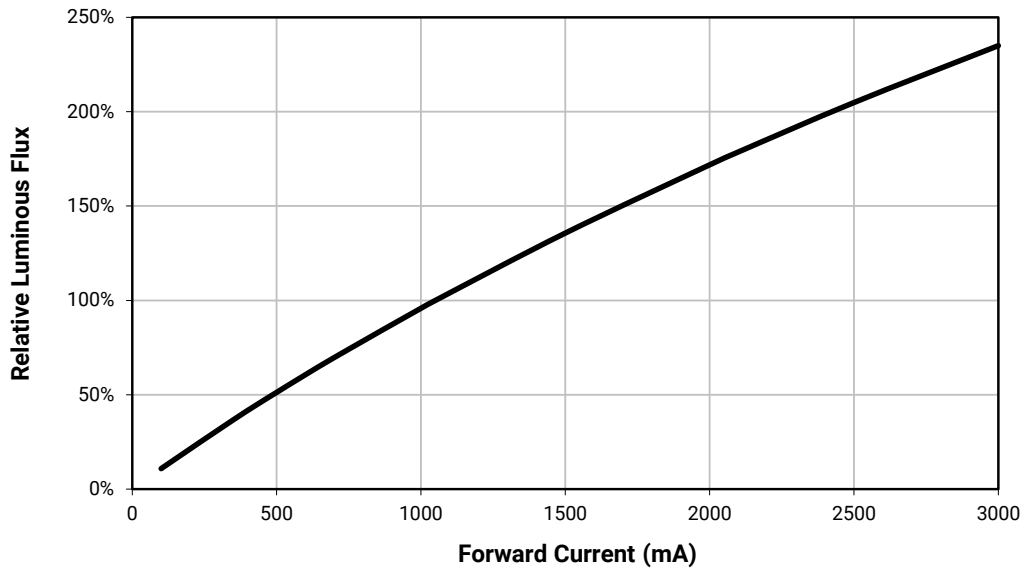


RELATIVE CHROMATICITY VS. CURRENT (WARM WHITE)

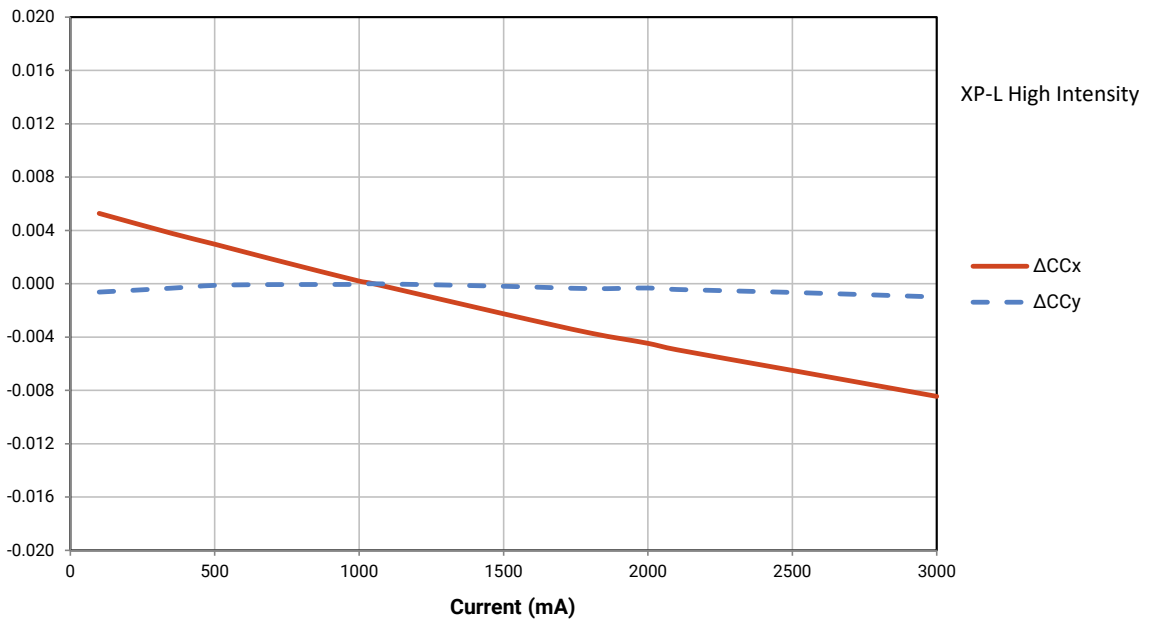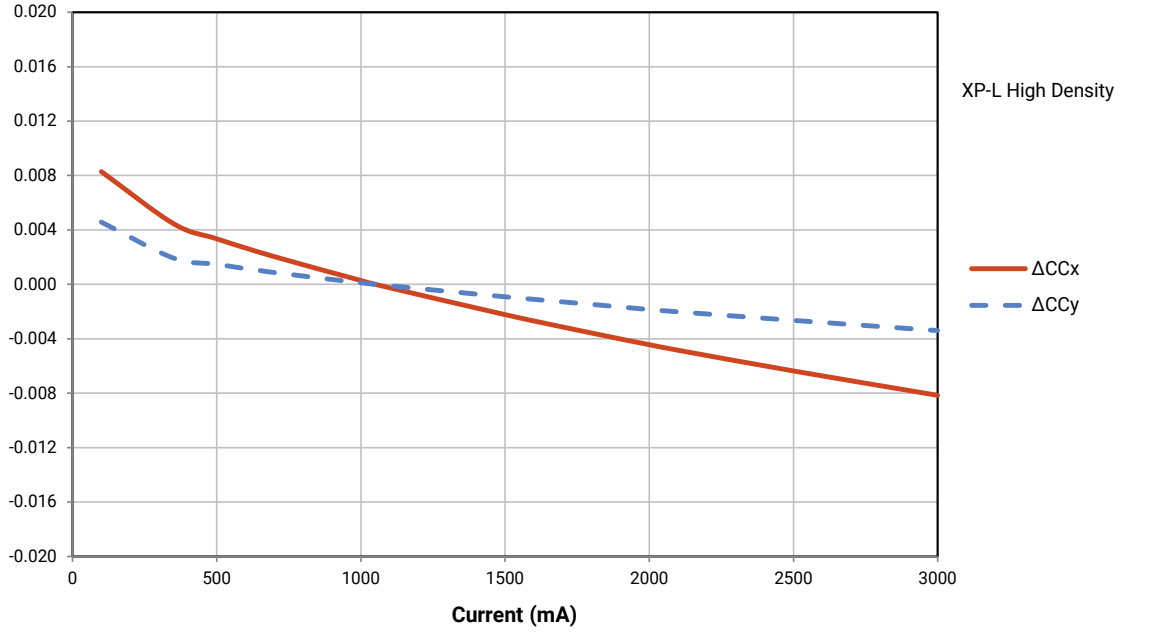

RELATIVE CHROMATICITY VS. TEMPERATURE (WARM WHITE)

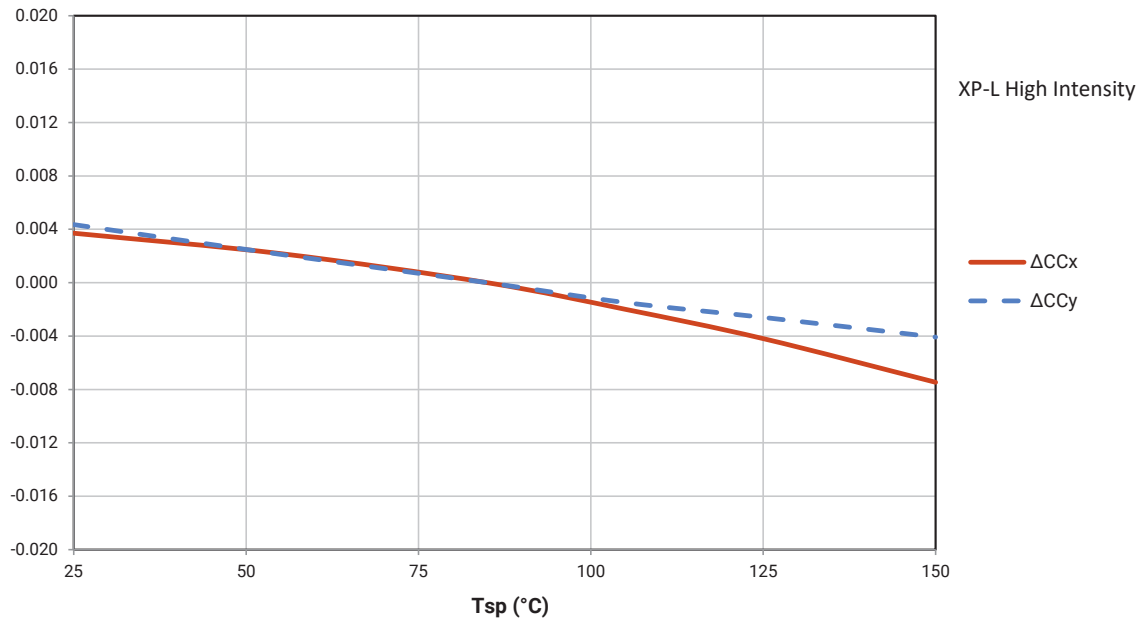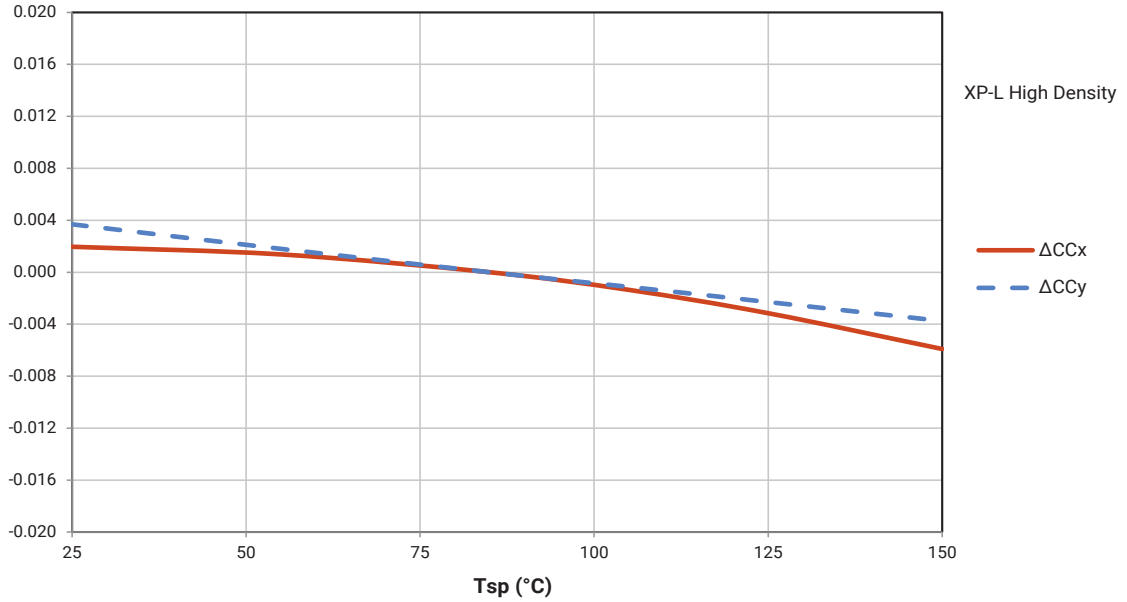


TYPICAL SPATIAL DISTRIBUTION

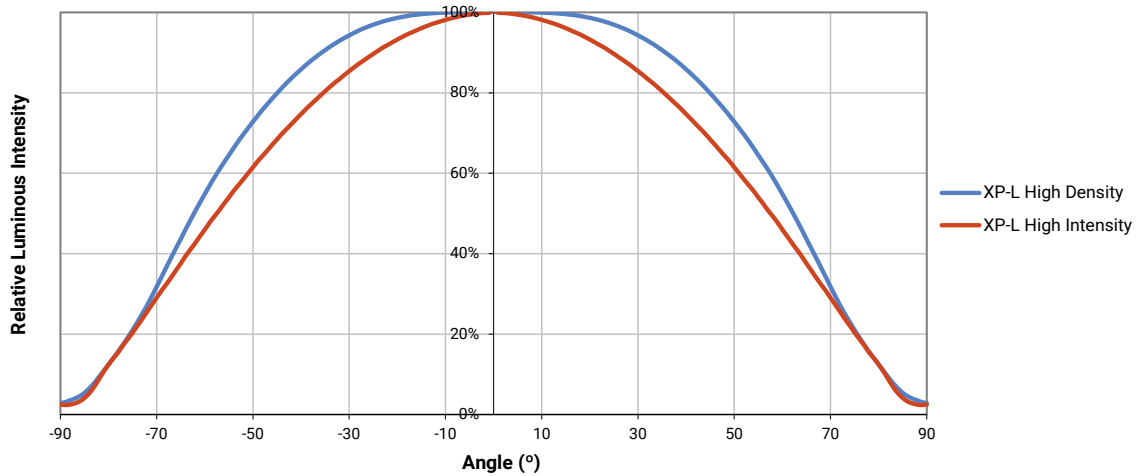

THERMAL DESIGN

The maximum forward current is determined by the thermal resistance between the LED junction and ambient. It is crucial for the end product to be designed in a manner that minimizes the thermal resistance from the solder point to ambient in order to optimize lamp life and optical characteristics.

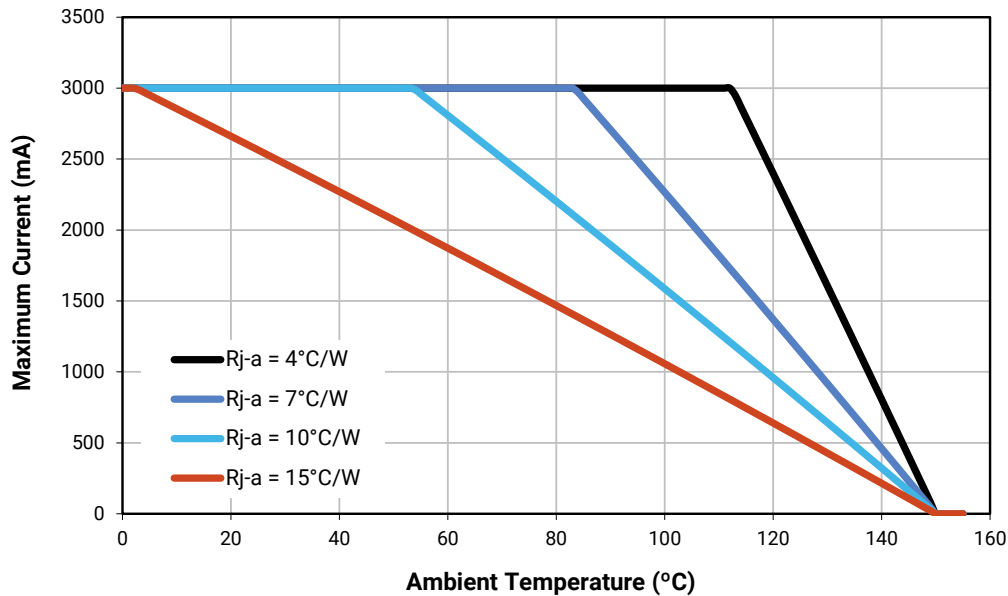

PERFORMANCE GROUPS – LUMINOUS FLUX

XLamp XP-L LEDs are tested for luminous flux and placed into one of the following luminous-flux groups:

| Group Code | Minimum Luminous Flux (lm) @ 1050 mA | Maximum Luminous Flux (lm) @ 1050 mA |
|------------|---|---|
| T3 | 220 | 240 |
| T4 | 240 | 260 |
| T5 | 260 | 280 |
| T6 | 280 | 300 |
| U2 | 300 | 320 |
| U3 | 320 | 340 |
| U4 | 340 | 360 |
| U5 | 360 | 380 |
| U6 | 380 | 400 |
| V2 | 400 | 420 |
| V3 | 420 | 440 |
| V4 | 440 | 460 |
| V5 | 460 | 480 |
| V6 | 480 | 500 |
| W2 | 500 | 520 |
| W3 | 520 | 540 |

PERFORMANCE GROUPS – CHROMATICITY

| Region | x | y | Region | x | y | Region | x | y | Region | x | y |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 0A | 0.2950 | 0.2970 | 0B | 0.2920 | 0.3060 | 0C | 0.2984 | 0.3133 | 0D | 0.2984 | 0.3133 |
| | 0.2920 | 0.3060 | | 0.2895 | 0.3135 | | 0.2962 | 0.3220 | | 0.3048 | 0.3207 |
| | 0.2984 | 0.3133 | | 0.2962 | 0.3220 | | 0.3028 | 0.3304 | | 0.3068 | 0.3113 |
| | 0.3009 | 0.3042 | | 0.2984 | 0.3133 | | 0.3048 | 0.3207 | | 0.3009 | 0.3042 |
| 0R | 0.2980 | 0.2880 | 0S | 0.2895 | 0.3135 | 0T | 0.2962 | 0.3220 | 0U | 0.3037 | 0.2937 |
| | 0.2950 | 0.2970 | | 0.2870 | 0.3210 | | 0.2937 | 0.3312 | | 0.3009 | 0.3042 |
| | 0.3009 | 0.3042 | | 0.2937 | 0.3312 | | 0.3005 | 0.3415 | | 0.3068 | 0.3113 |
| | 0.3037 | 0.2937 | | 0.2962 | 0.3220 | | 0.3028 | 0.3304 | | 0.3093 | 0.2993 |
| 1A | 0.3048 | 0.3207 | 1B | 0.3028 | 0.3304 | 1C | 0.3115 | 0.3391 | 1D | 0.3130 | 0.3290 |
| | 0.3130 | 0.3290 | | 0.3115 | 0.3391 | | 0.3205 | 0.3481 | | 0.3213 | 0.3373 |
| | 0.3144 | 0.3186 | | 0.3130 | 0.3290 | | 0.3213 | 0.3373 | | 0.3221 | 0.3261 |
| | 0.3068 | 0.3113 | | 0.3048 | 0.3207 | | 0.3130 | 0.3290 | | 0.3144 | 0.3186 |
| 1R | 0.3068 | 0.3113 | 1S | 0.3005 | 0.3415 | 1T | 0.3099 | 0.3509 | 1U | 0.3144 | 0.3186 |
| | 0.3144 | 0.3186 | | 0.3099 | 0.3509 | | 0.3196 | 0.3602 | | 0.3221 | 0.3261 |
| | 0.3161 | 0.3059 | | 0.3115 | 0.3391 | | 0.3205 | 0.3481 | | 0.3231 | 0.3120 |
| | 0.3093 | 0.2993 | | 0.3028 | 0.3304 | | 0.3115 | 0.3391 | | 0.3161 | 0.3059 |
| 2A | 0.3215 | 0.3350 | 2B | 0.3207 | 0.3462 | 2C | 0.3290 | 0.3538 | 2D | 0.3290 | 0.3417 |
| | 0.3290 | 0.3417 | | 0.3290 | 0.3538 | | 0.3376 | 0.3616 | | 0.3371 | 0.3490 |
| | 0.3290 | 0.3300 | | 0.3290 | 0.3417 | | 0.3371 | 0.3490 | | 0.3366 | 0.3369 |
| | 0.3222 | 0.3243 | | 0.3215 | 0.3350 | | 0.3290 | 0.3417 | | 0.3290 | 0.3300 |
| 2R | 0.3222 | 0.3243 | 2S | 0.3196 | 0.3602 | 2T | 0.3290 | 0.3690 | 2U | 0.3290 | 0.3300 |
| | 0.3290 | 0.3300 | | 0.3290 | 0.3690 | | 0.3381 | 0.3762 | | 0.3366 | 0.3369 |
| | 0.3290 | 0.3180 | | 0.3290 | 0.3538 | | 0.3376 | 0.3616 | | 0.3361 | 0.3245 |
| | 0.3231 | 0.3120 | | 0.3207 | 0.3462 | | 0.3290 | 0.3538 | | 0.3290 | 0.3180 |
| 3A | 0.3371 | 0.3490 | 3B | 0.3376 | 0.3616 | 3R | 0.3366 | 0.3369 | 3S | 0.3381 | 0.3762 |
| | 0.3451 | 0.3554 | | 0.3463 | 0.3687 | | 0.3440 | 0.3428 | | 0.3480 | 0.3840 |
| | 0.3440 | 0.3427 | | 0.3451 | 0.3554 | | 0.3429 | 0.3307 | | 0.3463 | 0.3687 |
| | 0.3366 | 0.3369 | | 0.3371 | 0.3490 | | 0.3361 | 0.3245 | | 0.3376 | 0.3616 |
| 4A | 0.3530 | 0.3597 | 4B | 0.3548 | 0.3736 | 4C | 0.3641 | 0.3804 | 4D | 0.3615 | 0.3659 |
| | 0.3615 | 0.3659 | | 0.3641 | 0.3804 | | 0.3736 | 0.3874 | | 0.3702 | 0.3722 |
| | 0.3590 | 0.3521 | | 0.3615 | 0.3659 | | 0.3702 | 0.3722 | | 0.3670 | 0.3578 |
| | 0.3512 | 0.3465 | | 0.3530 | 0.3597 | | 0.3615 | 0.3659 | | 0.3590 | 0.3521 |
| 4R | 0.3512 | 0.3465 | 4S | 0.3571 | 0.3907 | 4T | 0.3668 | 0.3957 | 4U | 0.3590 | 0.3521 |
| | 0.3590 | 0.3521 | | 0.3668 | 0.3957 | | 0.3771 | 0.4034 | | 0.3670 | 0.3578 |
| | 0.3567 | 0.3389 | | 0.3641 | 0.3804 | | 0.3736 | 0.3874 | | 0.3640 | 0.3440 |
| | 0.3495 | 0.3339 | | 0.3548 | 0.3736 | | 0.3641 | 0.3804 | | 0.3567 | 0.3389 |


PERFORMANCE GROUPS – CHROMATICITY (CONTINUED)

| Region | x | y | Region | x | y | Region | x | y | Region | x | y |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 5A1 | 0.3670 | 0.3578 | 5A2 | 0.3686 | 0.3649 | 5A3 | 0.3744 | 0.3685 | 5A4 | 0.3726 | 0.3612 |
| | 0.3686 | 0.3649 | | 0.3702 | 0.3722 | | 0.3763 | 0.3760 | | 0.3744 | 0.3685 |
| | 0.3744 | 0.3685 | | 0.3763 | 0.3760 | | 0.3825 | 0.3798 | | 0.3804 | 0.3721 |
| | 0.3726 | 0.3612 | | 0.3744 | 0.3685 | | 0.3804 | 0.3721 | | 0.3783 | 0.3646 |
| 5B1 | 0.3702 | 0.3722 | 5B2 | 0.3719 | 0.3797 | 5B3 | 0.3782 | 0.3837 | 5B4 | 0.3763 | 0.3760 |
| | 0.3719 | 0.3797 | | 0.3736 | 0.3874 | | 0.3802 | 0.3916 | | 0.3782 | 0.3837 |
| | 0.3782 | 0.3837 | | 0.3802 | 0.3916 | | 0.3869 | 0.3958 | | 0.3847 | 0.3877 |
| | 0.3763 | 0.3760 | | 0.3782 | 0.3837 | | 0.3847 | 0.3877 | | 0.3825 | 0.3798 |
| 5C1 | 0.3825 | 0.3798 | 5C2 | 0.3847 | 0.3877 | 5C3 | 0.3912 | 0.3917 | 5C4 | 0.3887 | 0.3836 |
| | 0.3847 | 0.3877 | | 0.3869 | 0.3958 | | 0.3937 | 0.4001 | | 0.3912 | 0.3917 |
| | 0.3912 | 0.3917 | | 0.3937 | 0.4001 | | 0.4006 | 0.4044 | | 0.3978 | 0.3958 |
| | 0.3887 | 0.3836 | | 0.3912 | 0.3917 | | 0.3978 | 0.3958 | | 0.3950 | 0.3875 |
| 5D1 | 0.3783 | 0.3646 | 5D2 | 0.3804 | 0.3721 | 5D3 | 0.3863 | 0.3758 | 5D4 | 0.3840 | 0.3681 |
| | 0.3804 | 0.3721 | | 0.3825 | 0.3798 | | 0.3887 | 0.3836 | | 0.3863 | 0.3758 |
| | 0.3863 | 0.3758 | | 0.3887 | 0.3836 | | 0.3950 | 0.3875 | | 0.3924 | 0.3794 |
| | 0.3840 | 0.3681 | | 0.3863 | 0.3758 | | 0.3924 | 0.3794 | | 0.3898 | 0.3716 |
| 6A1 | 0.3889 | 0.3690 | 6A2 | 0.3915 | 0.3768 | 6A3 | 0.3981 | 0.3800 | 6A4 | 0.3953 | 0.3720 |
| | 0.3915 | 0.3768 | | 0.3941 | 0.3848 | | 0.4010 | 0.3882 | | 0.3981 | 0.3800 |
| | 0.3981 | 0.3800 | | 0.4010 | 0.3882 | | 0.4080 | 0.3916 | | 0.4048 | 0.3832 |
| | 0.3953 | 0.3720 | | 0.3981 | 0.3800 | | 0.4048 | 0.3832 | | 0.4017 | 0.3751 |
| 6B1 | 0.3941 | 0.3848 | 6B2 | 0.3968 | 0.3930 | 6B3 | 0.4040 | 0.3966 | 6B4 | 0.4010 | 0.3882 |
| | 0.3968 | 0.3930 | | 0.3996 | 0.4015 | | 0.4071 | 0.4052 | | 0.4040 | 0.3966 |
| | 0.4040 | 0.3966 | | 0.4071 | 0.4052 | | 0.4146 | 0.4089 | | 0.4113 | 0.4001 |
| | 0.4010 | 0.3882 | | 0.4040 | 0.3966 | | 0.4113 | 0.4001 | | 0.4080 | 0.3916 |
| 6C1 | 0.4080 | 0.3916 | 6C2 | 0.4113 | 0.4001 | 6C3 | 0.4186 | 0.4037 | 6C4 | 0.4150 | 0.3950 |
| | 0.4113 | 0.4001 | | 0.4146 | 0.4089 | | 0.4222 | 0.4127 | | 0.4186 | 0.4037 |
| | 0.4186 | 0.4037 | | 0.4222 | 0.4127 | | 0.4299 | 0.4165 | | 0.4259 | 0.4073 |
| | 0.4150 | 0.3950 | | 0.4186 | 0.4037 | | 0.4259 | 0.4073 | | 0.4221 | 0.3984 |
| 6D1 | 0.4017 | 0.3751 | 6D2 | 0.4048 | 0.3832 | 6D3 | 0.4116 | 0.3865 | 6D4 | 0.4082 | 0.3782 |
| | 0.4048 | 0.3832 | | 0.4080 | 0.3916 | | 0.4150 | 0.3950 | | 0.4116 | 0.3865 |
| | 0.4116 | 0.3865 | | 0.4150 | 0.3950 | | 0.4221 | 0.3984 | | 0.4183 | 0.3898 |
| | 0.4082 | 0.3782 | | 0.4116 | 0.3865 | | 0.4183 | 0.3898 | | 0.4147 | 0.3814 |
| 7A1 | 0.4147 | 0.3814 | 7A2 | 0.4183 | 0.3898 | 7A3 | 0.4242 | 0.3919 | 7A4 | 0.4203 | 0.3833 |
| | 0.4183 | 0.3898 | | 0.4221 | 0.3984 | | 0.4281 | 0.4006 | | 0.4242 | 0.3919 |
| | 0.4242 | 0.3919 | | 0.4281 | 0.4006 | | 0.4342 | 0.4028 | | 0.4300 | 0.3939 |
| | 0.4203 | 0.3833 | | 0.4242 | 0.3919 | | 0.4300 | 0.3939 | | 0.4259 | 0.3853 |



PERFORMANCE GROUPS – CHROMATICITY (CONTINUED)

| Region | x | y | Region | x | y | Region | x | y | Region | x | y |
|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| 7B1 | 0.4221 | 0.3984 | 7B2 | 0.4259 | 0.4073 | 7B3 | 0.4322 | 0.4096 | 7B4 | 0.4281 | 0.4006 |
| | 0.4259 | 0.4073 | | 0.4299 | 0.4165 | | 0.4364 | 0.4188 | | 0.4322 | 0.4096 |
| | 0.4322 | 0.4096 | | 0.4364 | 0.4188 | | 0.4430 | 0.4212 | | 0.4385 | 0.4119 |
| | 0.4281 | 0.4006 | | 0.4322 | 0.4096 | | 0.4385 | 0.4119 | | 0.4342 | 0.4028 |
| 7C1 | 0.4342 | 0.4028 | 7C2 | 0.4385 | 0.4119 | 7C3 | 0.4449 | 0.4141 | 7C4 | 0.4403 | 0.4049 |
| | 0.4385 | 0.4119 | | 0.4430 | 0.4212 | | 0.4496 | 0.4236 | | 0.4449 | 0.4141 |
| | 0.4449 | 0.4141 | | 0.4496 | 0.4236 | | 0.4562 | 0.4260 | | 0.4513 | 0.4164 |
| | 0.4403 | 0.4049 | | 0.4449 | 0.4141 | | 0.4513 | 0.4164 | | 0.4465 | 0.4071 |
| 7D1 | 0.4259 | 0.3853 | 7D2 | 0.4300 | 0.3939 | 7D3 | 0.4359 | 0.3960 | 7D4 | 0.4316 | 0.3873 |
| | 0.4300 | 0.3939 | | 0.4342 | 0.4028 | | 0.4403 | 0.4049 | | 0.4359 | 0.3960 |
| | 0.4359 | 0.3960 | | 0.4403 | 0.4049 | | 0.4465 | 0.4071 | | 0.4418 | 0.3981 |
| | 0.4316 | 0.3873 | | 0.4359 | 0.3960 | | 0.4418 | 0.3981 | | 0.4373 | 0.3893 |
| 8A1 | 0.4373 | 0.3893 | 8A2 | 0.4418 | 0.3981 | 8A3 | 0.4475 | 0.3994 | 8A4 | 0.4428 | 0.3906 |
| | 0.4418 | 0.3981 | | 0.4465 | 0.4071 | | 0.4523 | 0.4085 | | 0.4475 | 0.3994 |
| | 0.4475 | 0.3994 | | 0.4523 | 0.4085 | | 0.4582 | 0.4099 | | 0.4532 | 0.4008 |
| | 0.4428 | 0.3906 | | 0.4475 | 0.3994 | | 0.4532 | 0.4008 | | 0.4483 | 0.3919 |
| 8B1 | 0.4465 | 0.4071 | 8B2 | 0.4513 | 0.4164 | 8B3 | 0.4573 | 0.4178 | 8B4 | 0.4523 | 0.4085 |
| | 0.4513 | 0.4164 | | 0.4562 | 0.4260 | | 0.4624 | 0.4274 | | 0.4573 | 0.4178 |
| | 0.4573 | 0.4178 | | 0.4624 | 0.4274 | | 0.4687 | 0.4289 | | 0.4634 | 0.4193 |
| | 0.4523 | 0.4085 | | 0.4573 | 0.4178 | | 0.4634 | 0.4193 | | 0.4582 | 0.4099 |
| 8C1 | 0.4582 | 0.4099 | 8C2 | 0.4634 | 0.4193 | 8C3 | 0.4695 | 0.4207 | 8C4 | 0.4641 | 0.4112 |
| | 0.4634 | 0.4193 | | 0.4687 | 0.4289 | | 0.4750 | 0.4304 | | 0.4695 | 0.4207 |
| | 0.4695 | 0.4207 | | 0.4750 | 0.4304 | | 0.4813 | 0.4319 | | 0.4756 | 0.4221 |
| | 0.4641 | 0.4112 | | 0.4695 | 0.4207 | | 0.4756 | 0.4221 | | 0.4700 | 0.4126 |
| 8D1 | 0.4483 | 0.3919 | 8D2 | 0.4532 | 0.4008 | 8D3 | 0.4589 | 0.4021 | 8D4 | 0.4538 | 0.3931 |
| | 0.4532 | 0.4008 | | 0.4582 | 0.4099 | | 0.4641 | 0.4112 | | 0.4589 | 0.4021 |
| | 0.4589 | 0.4021 | | 0.4641 | 0.4112 | | 0.4700 | 0.4126 | | 0.4646 | 0.4034 |
| | 0.4538 | 0.3931 | | 0.4589 | 0.4021 | | 0.4646 | 0.4034 | | 0.4593 | 0.3944 |


STANDARD COOL WHITE KITS PLOTTED ON ANSI STANDARD CHROMATICITY REGIONS

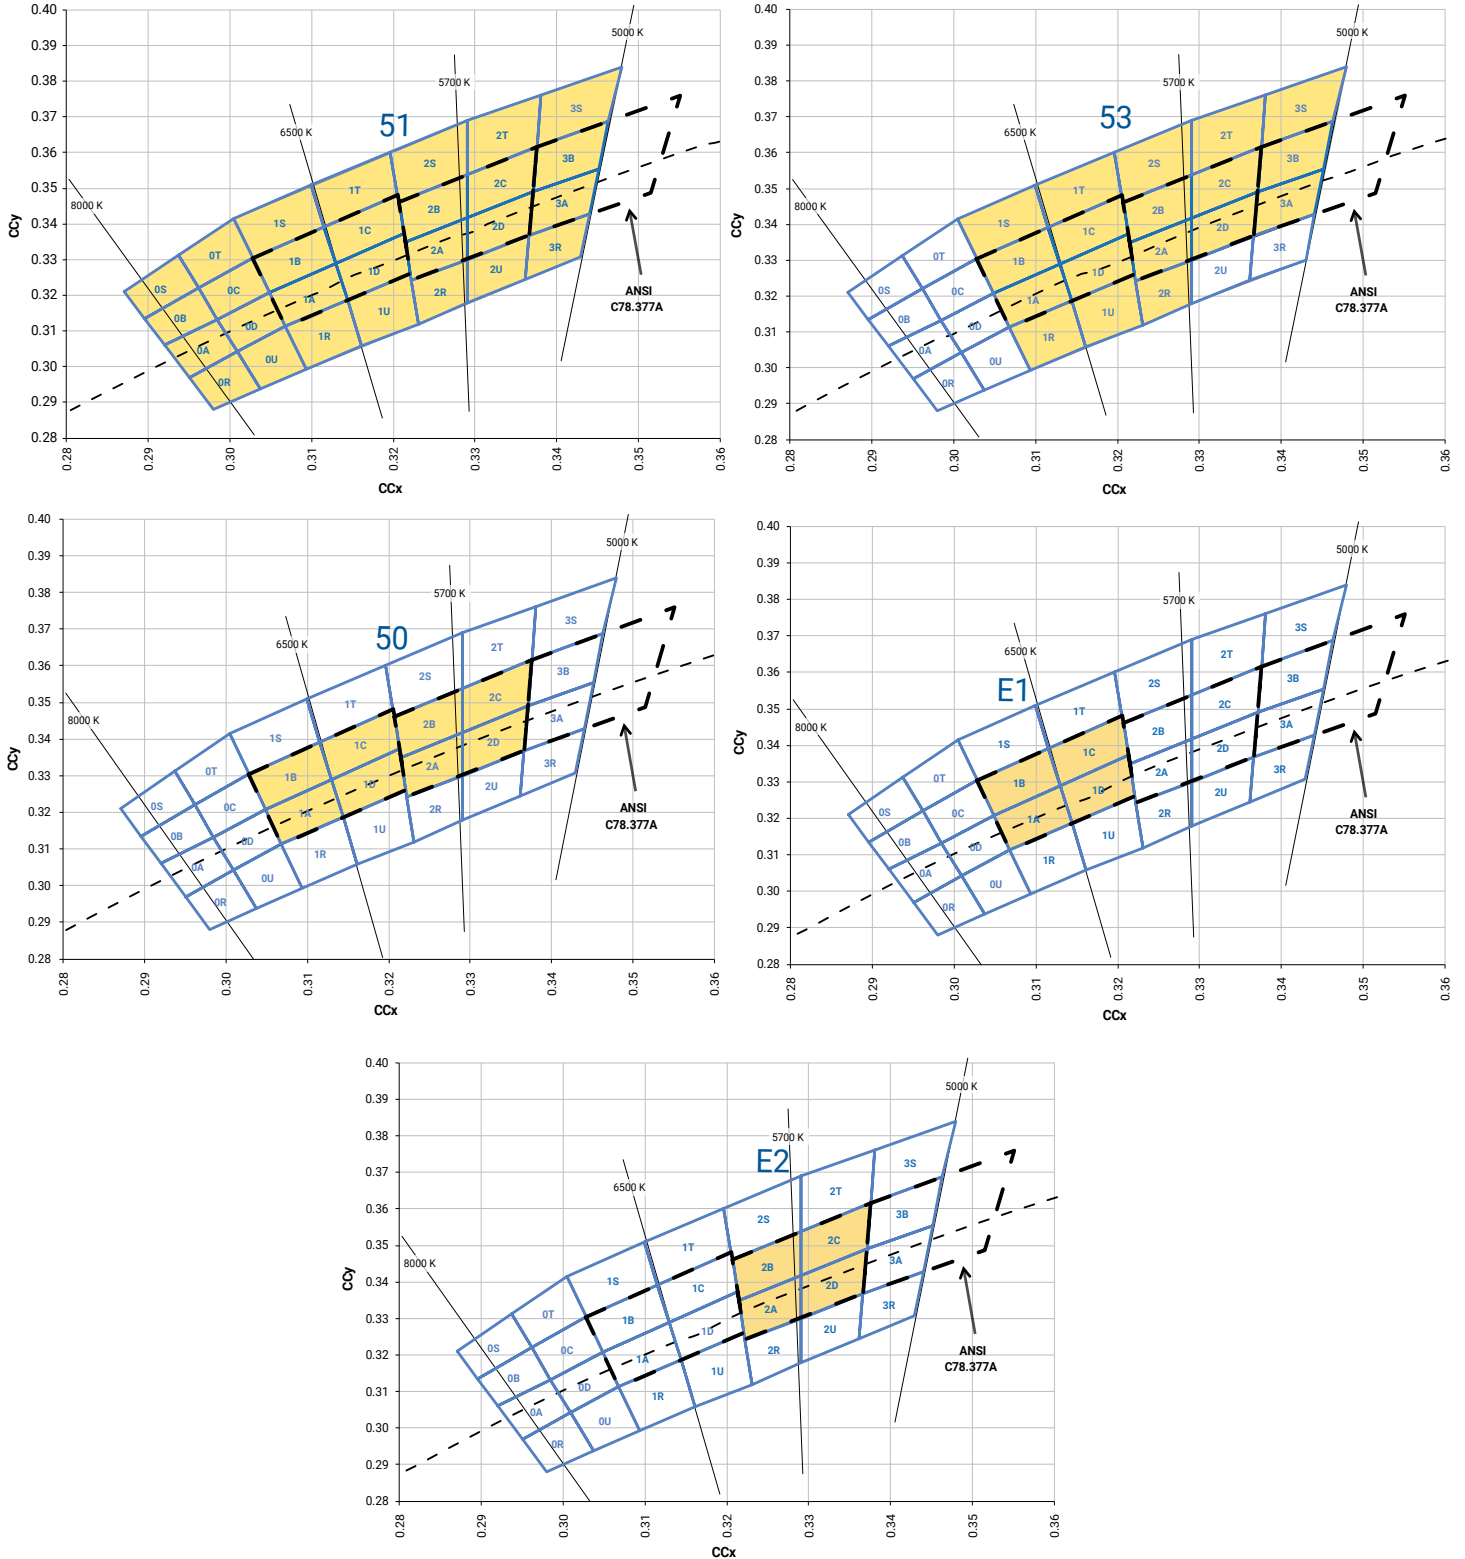

STANDARD WARM AND NEUTRAL WHITE KITS PLOTTED ON ANSI STANDARD CHROMATICITY REGIONS

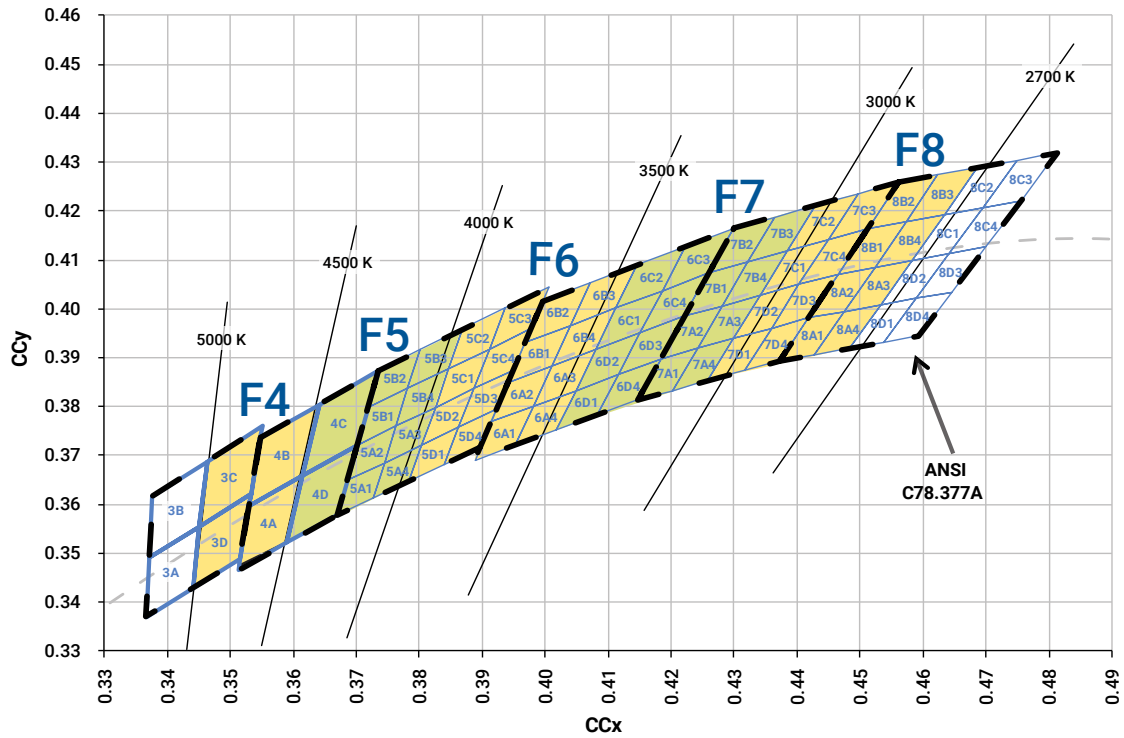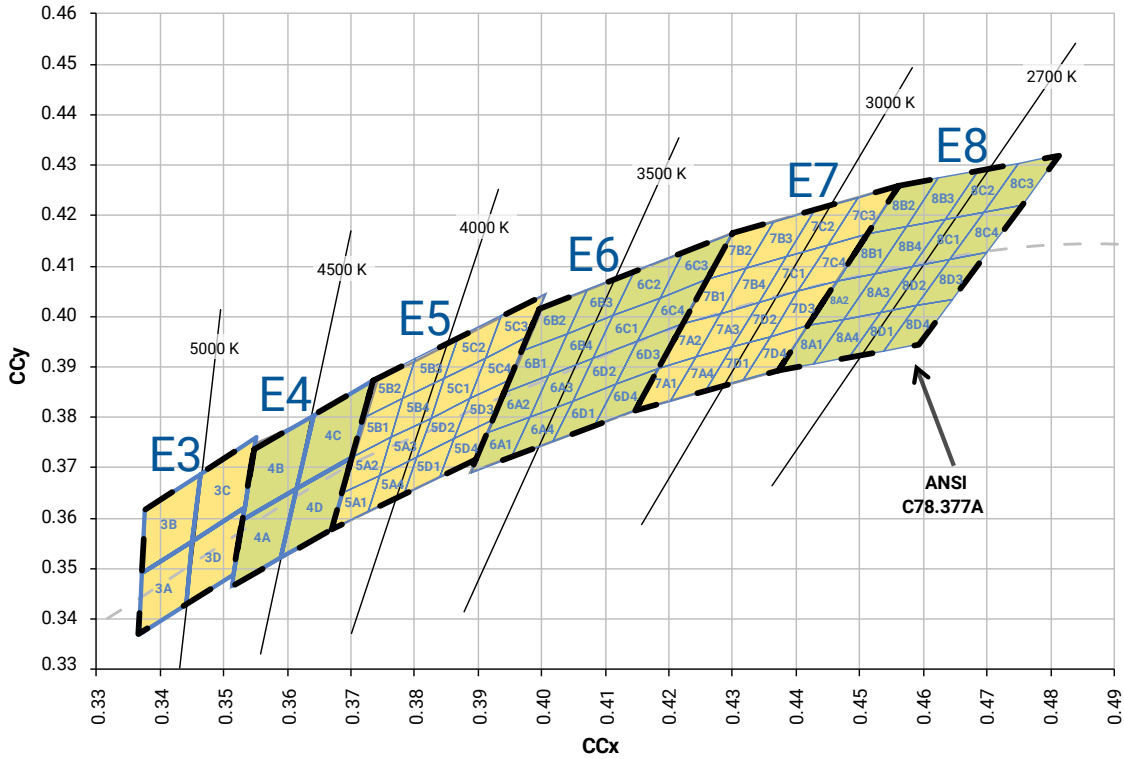

STANDARD WARM AND NEUTRAL WHITE KITS PLOTTED ON ANSI STANDARD CHROMATICITY REGIONS - CONTINUED

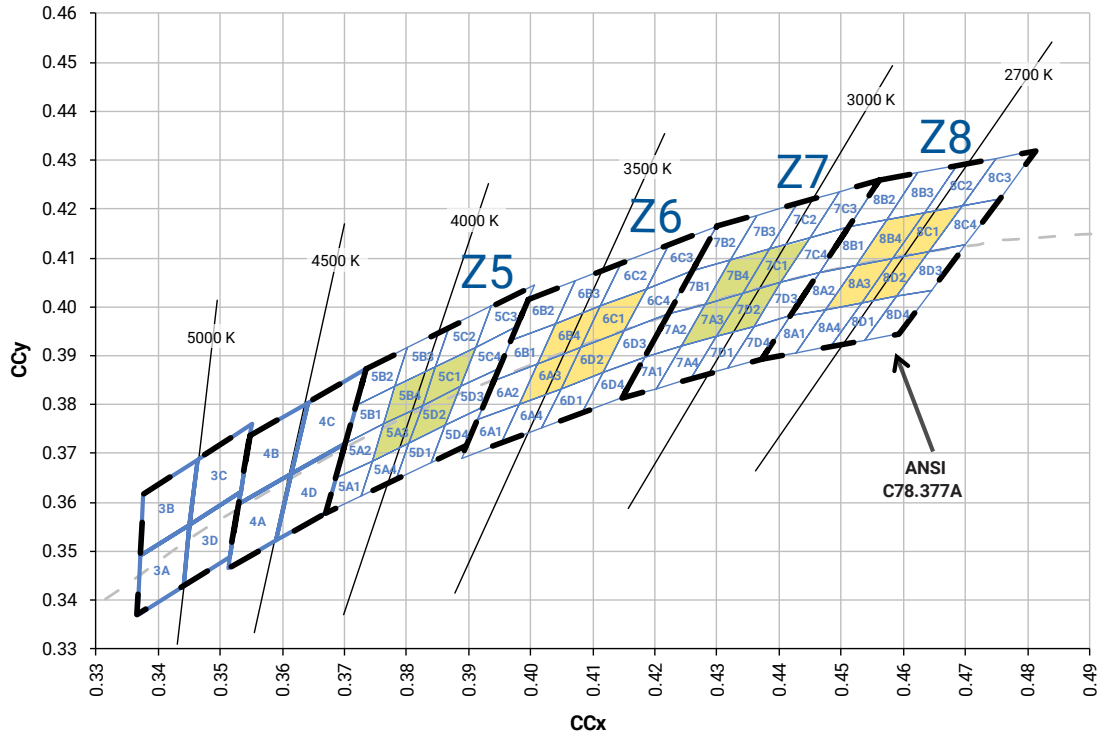


STANDARD CHROMATICITY KITS

The following table provides the chromaticity bins associated with chromaticity kits.

| Color | CCT | Kit | Chromaticity Bins |
|---------------|--------|-----|--|
| Cool White | 6200 K | 51 | 0A, 0B, 0C, 0D, 0R, 0S, 0T, 0U, 1A, 1B, 1C, 1D, 1R, 1S, 1T, 1U, 2A, 2B, 2C, 2D, 2R, 2S, 2T, 2U, 3A, 3B, 3R, 3S |
| | 6000 K | 53 | 1A, 1B, 1C, 1D, 1R, 1S, 1T, 1U, 2A, 2B, 2C, 2D, 2R, 2S, 2T, 3A, 3B, 3S |
| | 6200 K | 50 | 1A, 1B, 1C, 1D, 2A, 2B, 2C, 2D |
| | 6500 K | E1 | 1A, 1B, 1C, 1D |
| | 5700 K | E2 | 2A, 2B, 2C, 2D |
| Neutral White | 5000 K | E3 | 3A, 3B, 3C, 3D |
| | 4750 K | F4 | 3C, 3D, 4A, 4B |
| | 4500 K | E4 | 4A, 4B, 4C, 4D |
| | 4250 K | F5 | 4C, 4D, 5A1, 5A2, 5A3, 5A4, 5B1, 5B2, 5B3, 5B4 |
| | 4000 K | E5 | 5A1, 5A2, 5A3, 5A4, 5B1, 5B2, 5B3, 5B4, 5C1, 5C2, 5C3, 5C4, 5D1, 5D2, 5D3, 5D4 |
| | 4000 K | Z5 | 5A3, 5B4, 5C1, 5D2 |
| | 3750 K | F6 | 5C1, 5C2, 5C3, 5C4, 5D1, 5D2, 5D3, 5D4, 6A1, 6A2, 6A3, 6A4, 6B1, 6B2, 6B3, 6B4 |
| Warm White | 3500 K | E6 | 6A1, 6A2, 6A3, 6A4, 6B1, 6B2, 6B3, 6B4, 6C1, 6C2, 6C3, 6C4, 6D1, 6D2, 6D3, 6D4 |
| | 3500 K | Z6 | 6A3, 6B4, 6C1, 6D2 |
| | 3250 K | F7 | 6C1, 6C2, 6C3, 6C4, 6D1, 6D2, 6D3, 6D4, 7A1, 7A2, 7A3, 7A4, 7B1, 7B2, 7B3, 7B4 |
| | 3000 K | E7 | 7A1, 7A2, 7A3, 7A4, 7B1, 7B2, 7B3, 7B4, 7C1, 7C2, 7C3, 7C4, 7D1, 7D2, 7D3, 7D4 |
| | 3000 K | Z7 | 7A3, 7B4, 7C1, 7D2 |
| | 2850 K | F8 | 7C1, 7C2, 7C3, 7C4, 7D1, 7D2, 7D3, 7D4, 8A1, 8A2, 8A3, 8A4, 8B1, 8B2, 8B3, 8B4 |
| | 2700 K | E8 | 8A1, 8A2, 8A3, 8A4, 8B1, 8B2, 8B3, 8B4, 8C1, 8C2, 8C3, 8C4, 8D1, 8D2, 8D3, 8D4 |
| | 2700 K | Z8 | 8A3, 8B4, 8C1, 8D2 |

BIN AND ORDER CODE FORMATS


XP-L bin codes and order codes are configured in the following manner:

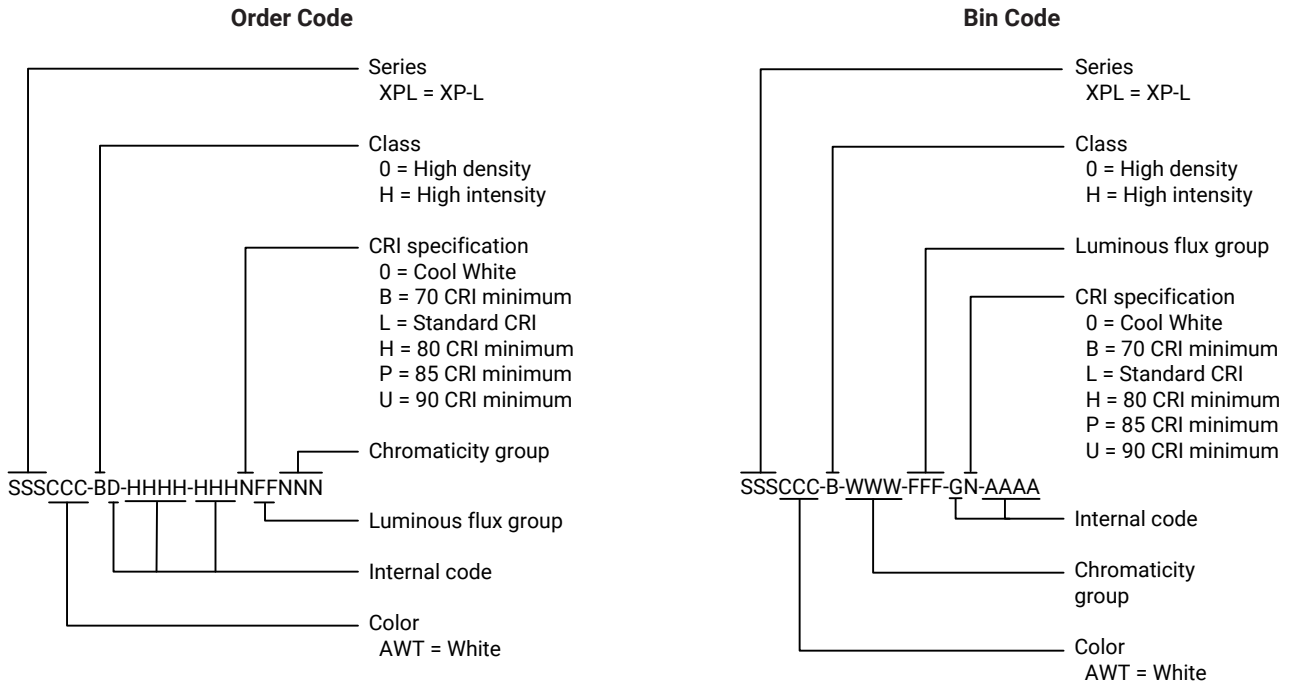

REFLOW SOLDERING CHARACTERISTICS

In testing, Cree LED has found XLamp XP-L LEDs to be compatible with JEDEC J-STD-020C, using the parameters listed below. As a general guideline, Cree LED recommends that users follow the recommended soldering profile provided by the manufacturer of the solder paste used, and therefore it is the lamp or luminaire manufacturer’s responsibility to determine applicable soldering requirements.

Note that this general guideline may not apply to all PCB designs and configurations of reflow soldering equipment.

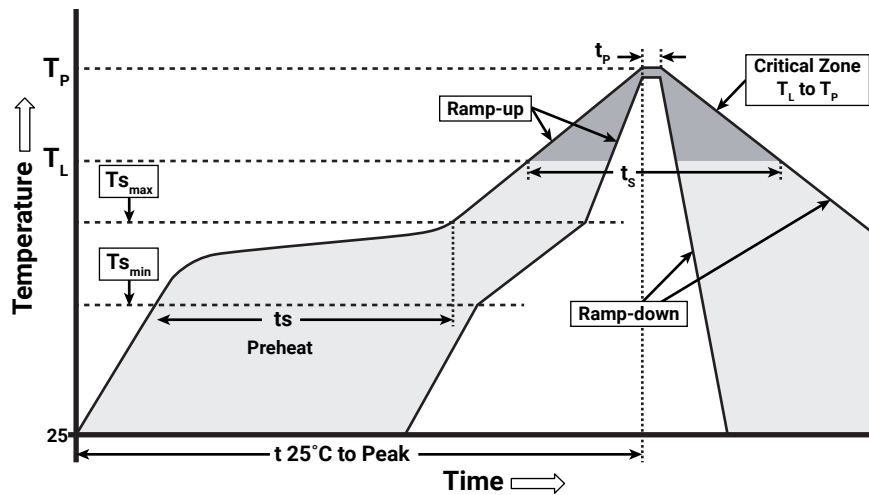

IPC/JEDEC J-STD-020C

| Profile Feature | Lead-Free Solder |
|---|------------------|
| Average Ramp-Up Rate ($T_{s_{max}}$ to T_p) | 1.2 °C/second |
| Preheat: Temperature Min ($T_{s_{min}}$) | 120 °C |
| Preheat: Temperature Max ($T_{s_{max}}$) | 170 °C |
| Preheat: Time ($t_{s_{min}}$ to $t_{s_{max}}$) | 65-150 seconds |
| Time Maintained Above: Temperature (T_L) | 217 °C |
| Time Maintained Above: Time (t_s) | 45-90 seconds |
| Peak/Classification Temperature (T_p) | 235 - 245 °C |
| Time Within 5 °C of Actual Peak Temperature (t_p) | 20-40 seconds |
| Ramp-Down Rate | 1 - 6 °C/second |
| Time 25 °C to Peak Temperature | 4 minutes max. |

Note: All temperatures refer to the topside of the package, measured on the package body surface.

NOTES

Measurements

The luminous flux, radiant power, chromaticity, forward voltage and CRI measurements in this document are binning specifications only and solely represent product measurements as of the date of shipment. These measurements will change over time based on a number of factors that are not within Cree LED's control and are not intended or provided as operational specifications for the products. Calculated values are provided for informational purposes only and are not intended or provided as specifications.

Pre-Release Qualification Testing

Please read the [LED Reliability Overview](#) for details of the qualification process Cree LED applies to ensure long-term reliability for XLamp LEDs and details of Cree LED's pre-release qualification testing for XLamp LEDs.

Lumen Maintenance

Cree LED now uses standardized IES LM-80-08 and TM-21-11 methods for collecting long-term data and extrapolating LED lumen maintenance. For information on the specific LM-80 data sets available for this LED, refer to the public [LM-80 results document](#).

Please read the [Long-Term Lumen Maintenance application note](#) for more details on Cree LED's lumen maintenance testing and forecasting. Please read the [Thermal Management application note](#) for details on how thermal design, ambient temperature, and drive current affect the LED junction temperature.

Moisture Sensitivity

Cree LED recommends keeping XLamp LEDs in the provided, resealable moisture-barrier packaging (MBP) until immediately prior to soldering. Unopened MBPs that contain XLamp LEDs do not need special storage for moisture sensitivity.

Once the MBP is opened, XLamp XP-L LEDs may be stored as MSL 1 per JEDEC J-STD-033, meaning they have unlimited floor life in conditions of ≤ 30 °C/85% relative humidity (RH). Regardless of the storage condition, Cree LED recommends sealing any unsoldered LEDs in the original MBP.

RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Cree LED representative or from the [Product Ecology](#) section of the Cree LED website.

REACH Compliance

REACH substances of very high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a Cree LED representative to insure you get the most up-to-date REACH Declaration. REACH banned substance information (REACH Article 67) is also available upon request.

NOTES - CONTINUED

UL® Recognized Component

This product meets the requirements to be considered a UL Recognized Component with Level 4 enclosure consideration. The LED package or a portion thereof has been investigated as a fire and electrical enclosure per ANSI/UL 8750.

Vision Advisory

WARNING: Do not look at an exposed lamp in operation. Eye injury can result. For more information about LEDs and eye safety, please refer to the [LED Eye Safety application note](#).


MECHANICAL DIMENSIONS

All measurements are ±.13 mm unless otherwise indicated.


XP-L High Density

XPLAWT-00-xxxx-xxxxxxxxxx


High Density

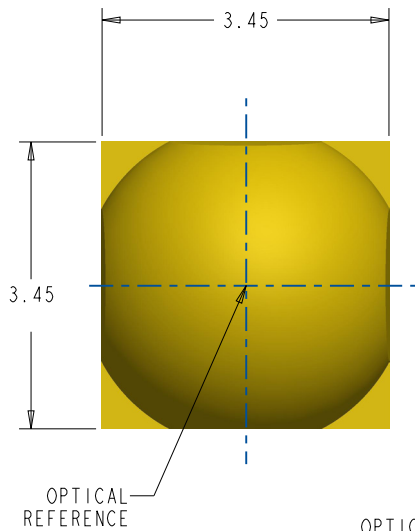

Top View

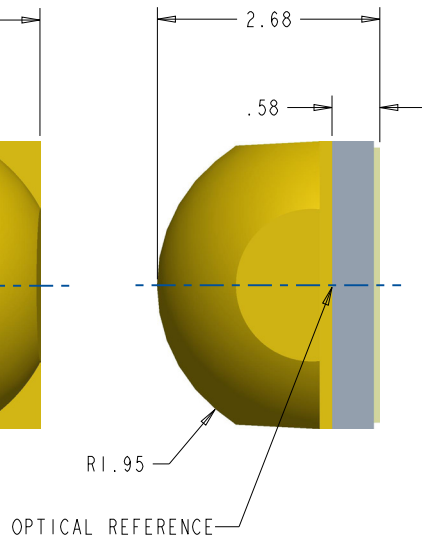


Side View

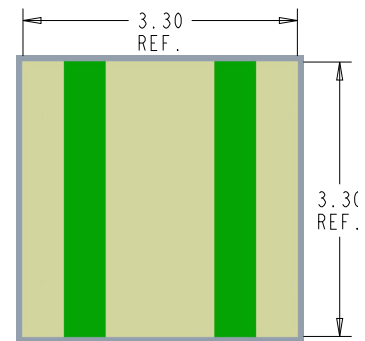

Bottom View

Alternate bottom views of the XP-L High Density LED are shown in the diagrams below.

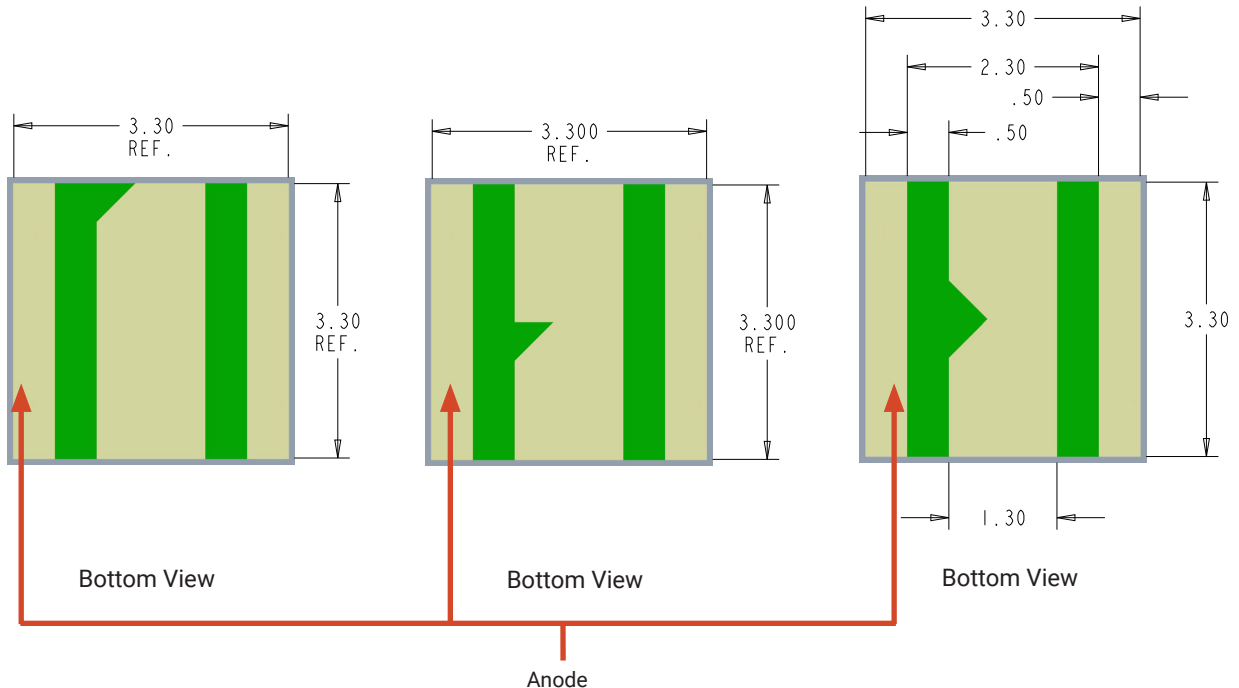


MECHANICAL DIMENSIONS - CONTINUED


XP-L High Intensity

XPLAWT-H0-xxxx-xxxxxxxxxx

High Intensity

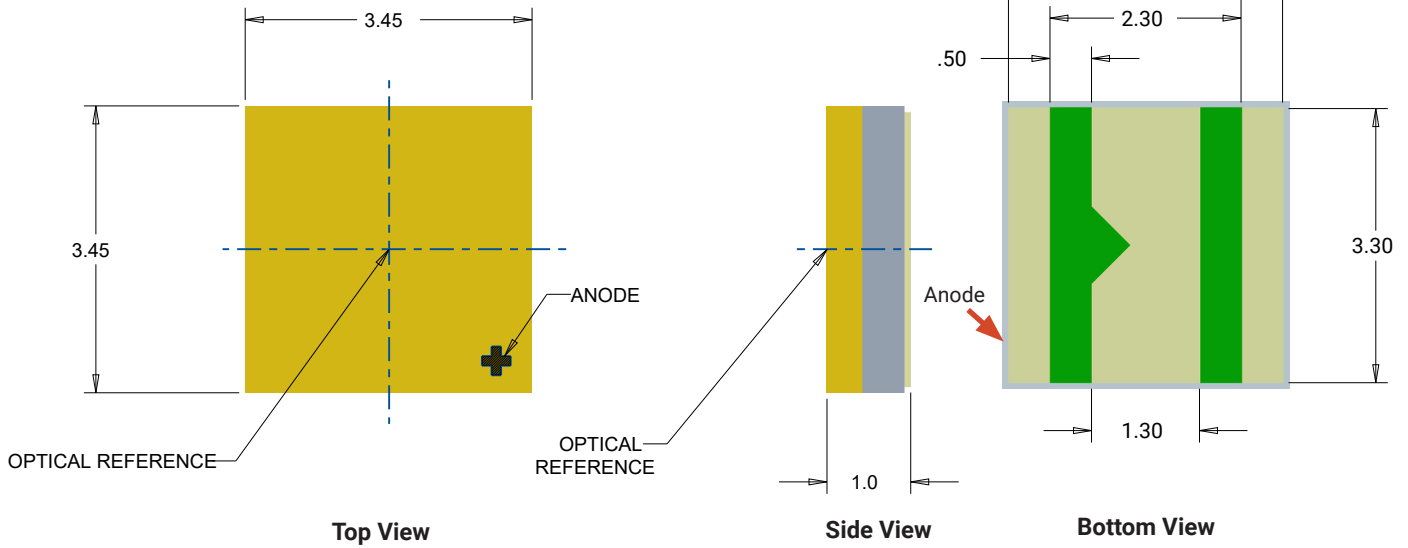

XP-L High Density & High Intensity

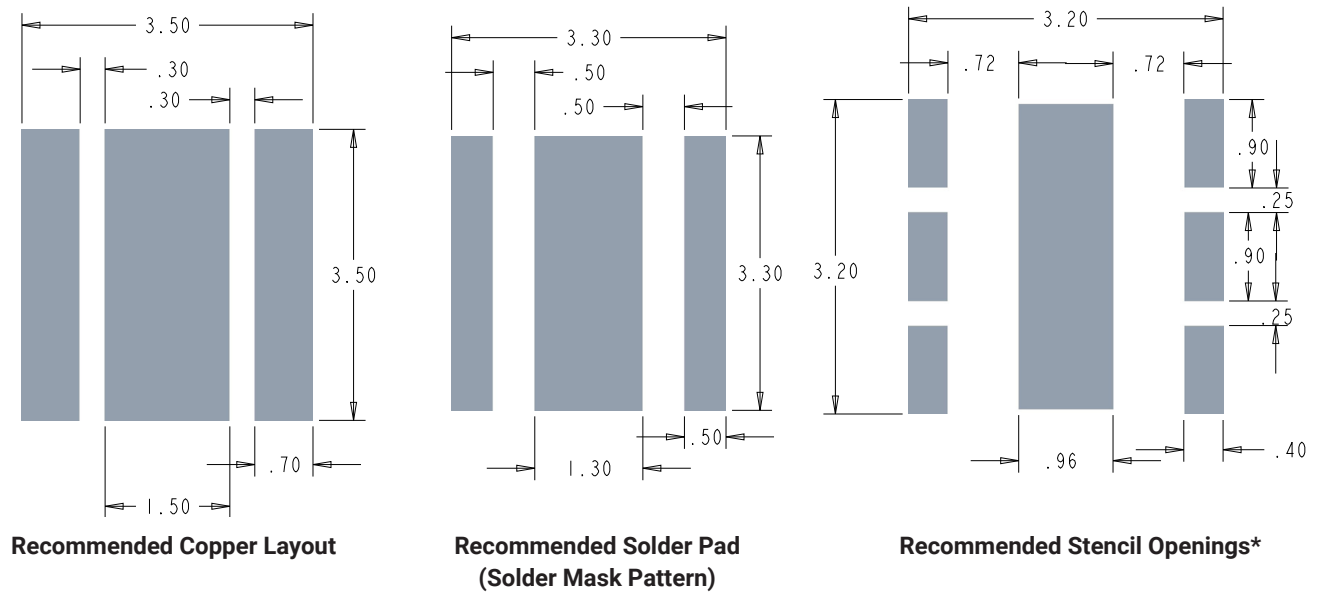

Notes:

- Cree LED recommends using thermal pad kickouts to maximize component thermal performance.
- Cree LED recommends using white solder mask material to minimize system optical loss.
- * This stencil has been tested and optimized for the avoidance of voiding when using ALPHA® LUMET® P30 Maxrel solder paste. For other solder pastes, a "window pane" design for the thermal pad stencil may result in a lower voiding percentage. Contact your local Cree LED Field Applications Engineer for consultation regarding your specific application.


TAPE AND REEL

All Cree LED carrier tapes conform to EIA-481D, Automated Component Handling Systems Standard.




Except as noted, all dimensions in mm [inches]

XP-L High Density

XPLAWT-00-xxxx-xxxxxxxxxx

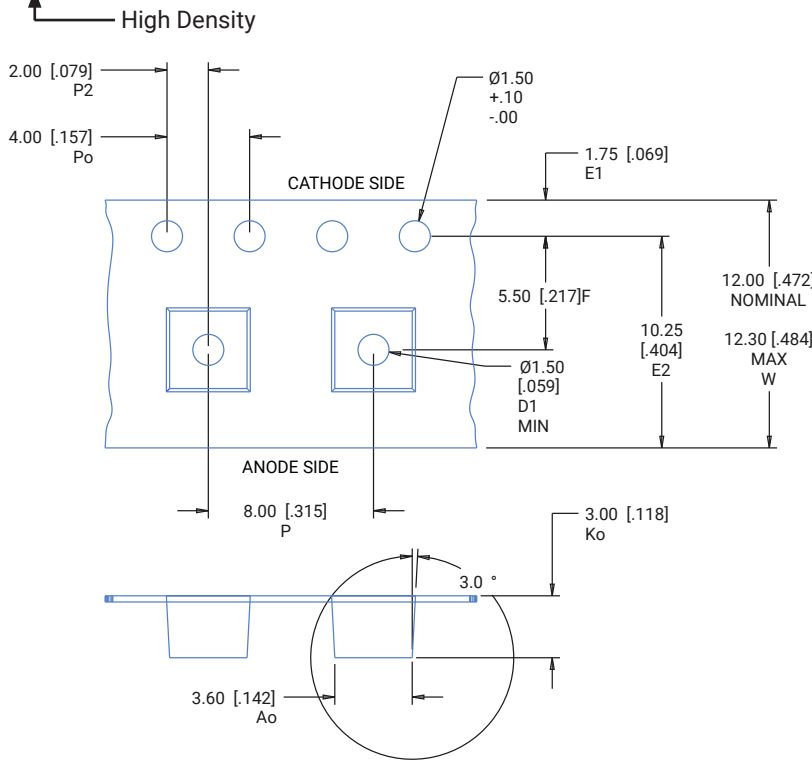

| POCKET SIZE | |
|-------------|-----------------|
| Ao - | 3.60 mm [.142"] |
| Bo - | 3.60 mm [.142"] |
| Ko - | 3.00 mm [.118"] |

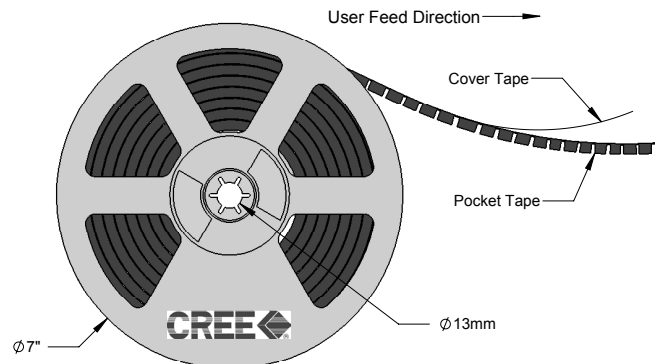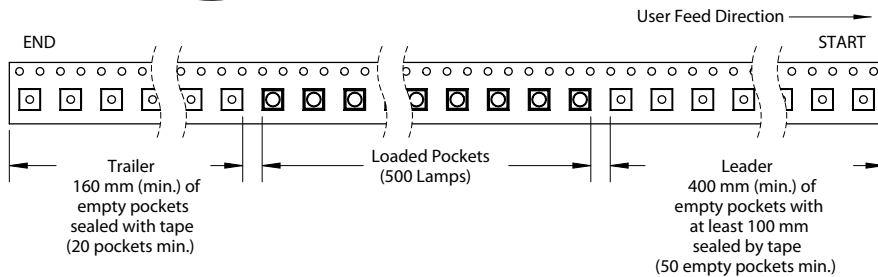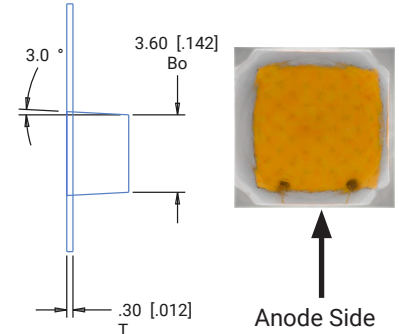


TAPE AND REEL - CONTINUED




XP-L High Intensity

XPLAWT-H0-xxxx-xxxxxxxxxx

High Intensity

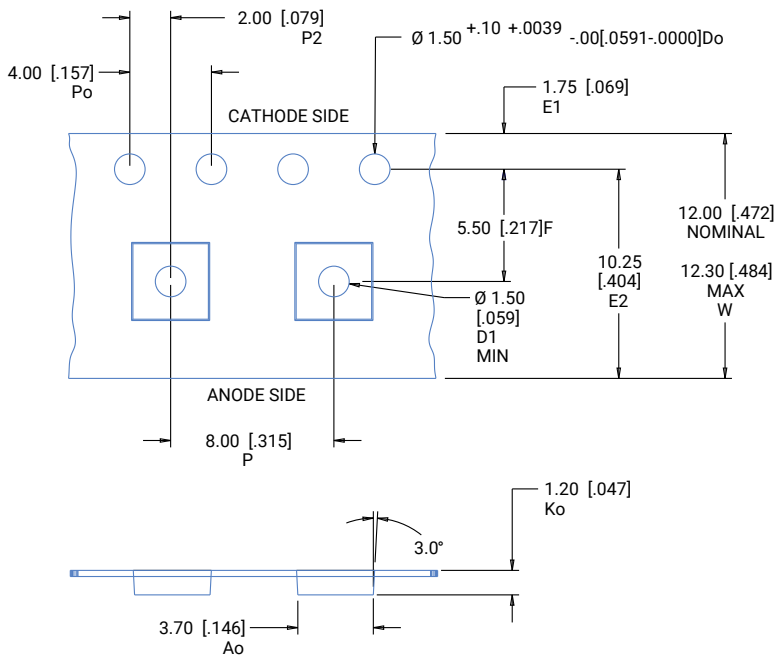


| POCKET SIZE | |
|-------------|-----------------|
| Ao - | 3.70 mm [.146"] |
| Bo - | 3.70 mm [.146"] |
| Ko - | 1.20 mm [.047"] |

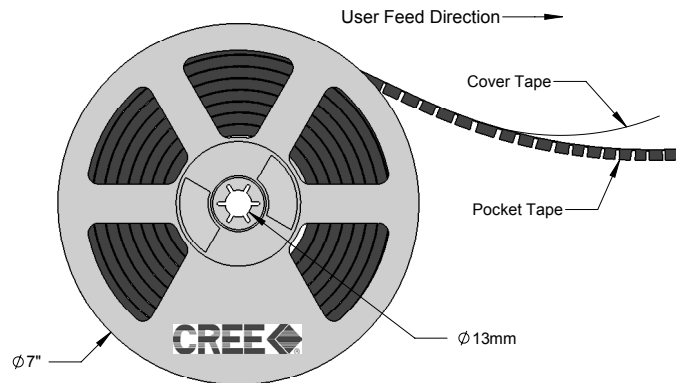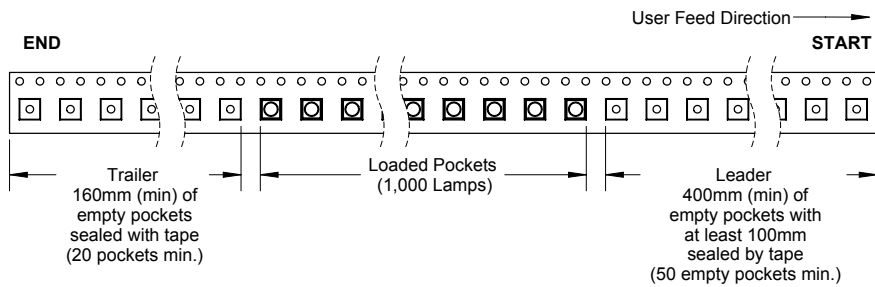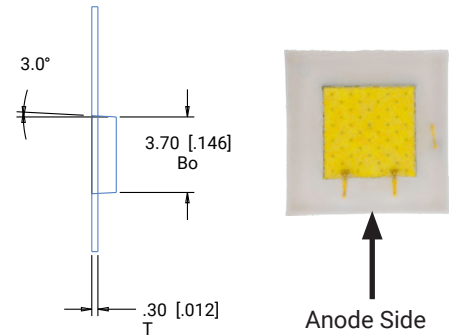


PACKAGING

Unpackaged Reel

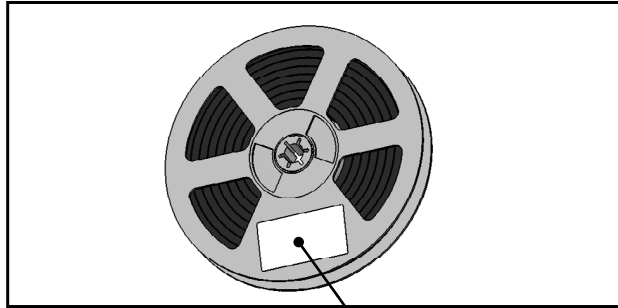

Label with Cree Bin Code, Quantity, Reel ID


Packaged Reel

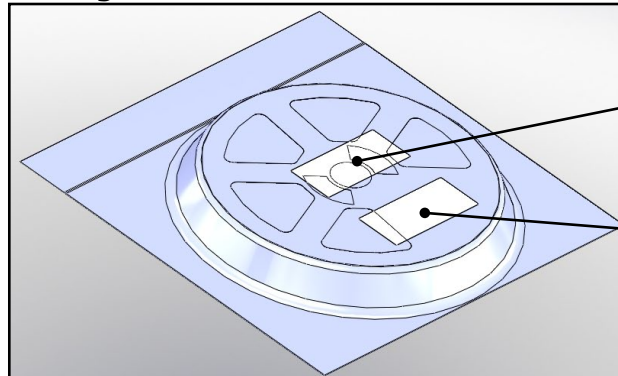

Label with Cree Order Code, Quantity, Reel ID, PO #

Label with Cree Bin Code, Quantity, Reel ID

Boxed Reel

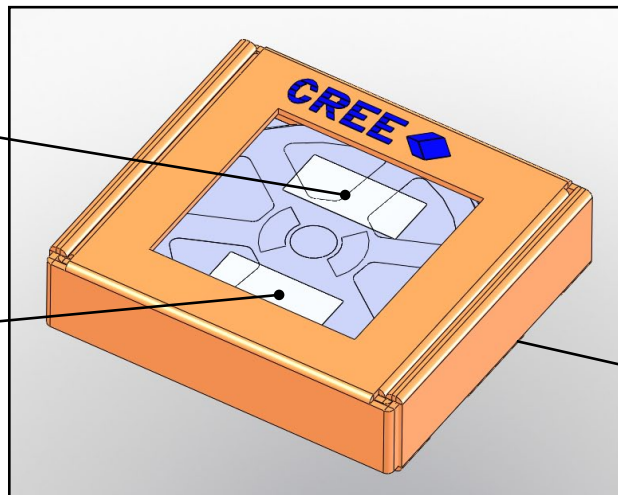

Label with Cree Order Code, Quantity, Reel ID, PO #

Label with Cree Bin Code, Quantity, Reel ID

Patent Label (on bottom of box)